

UNIVERSAL

UNBS13

Universal 1 3/8" Cylindrical Body Spray



SHOWN IN UNIVERSAL 1 3/8" CYLINDRICAL BODY SPRAY | UNBS13

TECHNICAL DETAILS

Depth/Width: 3 1/16"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: 1/2" Male NPT
 Installation Type: Wall Mounted
 Length: 2 3/8"
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.0 gpm
 Suggested Application: Bath
 Water Pressure Maximum: 80.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Featuring enduring designs that complement any Waterworks element, this collection spans fittings to accessories, bringing exquisite proportion and balance to any environment.

CODES & STANDARDS

ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Cylindrical design is adjustable to allow precise and custom spray placement

Each body spray regulated to 1.0 gpm

Available in the full range of Waterworks Metal Finishes for Fittings

Unlacquered Brass available November 2016; Special Finishes available starting December 2016

CERTIFICATIONS




PRODUCT (NOTES)


UNIVERSAL

UNBS13


Universal 1 3/8" Cylindrical Body Spray

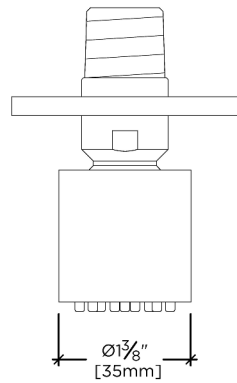

TOP VIEW SCALE: 6"=1'-0"



FRONT VIEW SCALE: 6"=1'-0"

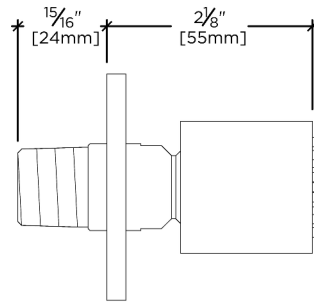

SIDE VIEW SCALE: 6"=1'-0"