

UNIVERSAL

USH305

Universal Transitional 5" Showerhead with Adjustable Spray



SHOWN IN UNIVERSAL TRANSITIONAL 5" SHOWERHEAD WITH ADJUSTABLE SPRAY | USH305

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Adjustable Spray
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

USH305X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), DOE, State of MA

PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 8" rain showerhead

Adjustable showerhead features three spray patterns


Stocked in Brass, Chrome and Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)


Universal Transitional 5" Showerhead with Adjustable Spray

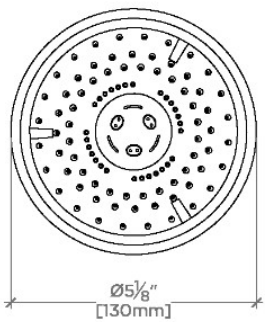


CEILING VIEW SCALE: 3"=1'-0"

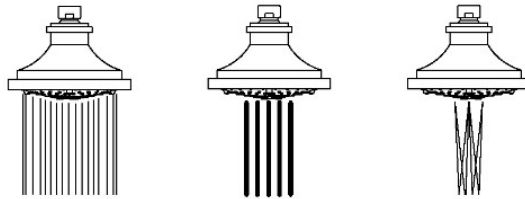

SPRAY PATTERNS

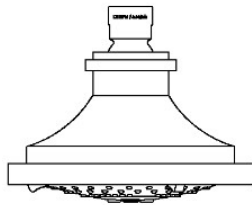

FRONT VIEW SCALE: 3"=1'-0"

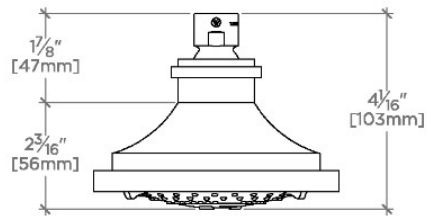

SIDE VIEW

SCALE: 3"=1'-0"