

RIVERUN

RRS357

Riverun 5" Showerhead with Adjustable Spray with 12" Wall Mounted 90 Degree Shower Arm



SHOWN IN RIVERUN 5" SHOWERHEAD WITH ADJUSTABLE SPRAY WITH 12" WALL MOUNTED 90 DEGREE SHOWER ARM | RRS357

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Adjustable Spray
 Fittings Hole Diameter: 1 1/4"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male NPT
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.75 gpm
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

This new American classic was designed with simplicity in mind. Featuring streamlined forms and honest details, it's the epitome of quiet elegance.

CODES & STANDARDS

RSS357X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 5" showerhead with three adjustable spray patterns

Includes a 12" wall mounted 90 degree shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)


RIVERUN

RRS357


Riverun 5" Showerhead with Adjustable Spray with 12" Wall Mounted 90 Degree Shower Arm

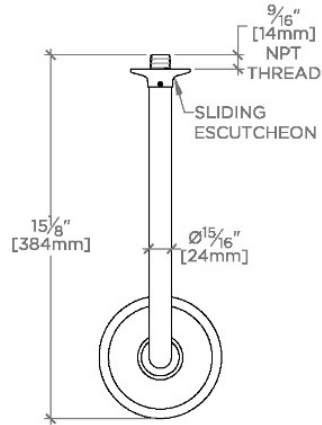


TOP VIEW SCALE: $1\frac{1}{2}"=1'-0"$

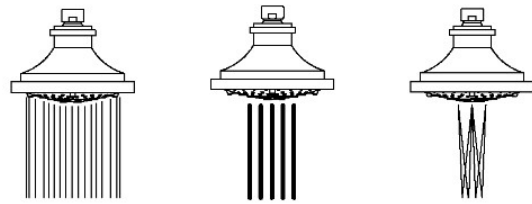

SPRAY PATTERNS

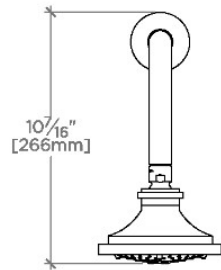

FRONT VIEW SCALE: $1\frac{1}{2}"=1'-0"$

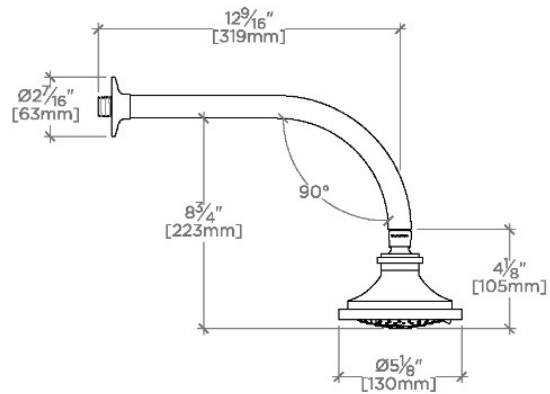

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$