

.25

.25 Wall Mounted Tub Spout

PTTS82



SHOWN IN .25 WALL MOUNTED TUB SPOUT | PTTS82

## TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray  
 Escutcheon Primary Material: Brass  
 Fittings Hole Diameter: 1 1/4"  
 Depth / Width: 9 1/8"  
 Height: 2 7/8"  
 Inlet Connection Size: 3/4"  
 Inlet Connection Type: Copper Sweat  
 Installation Type: Wall Mounted  
 Length: 2 5/8"  
 Primary Material: Brass  
 Spout Swivel: N  
 Suggested Application: Bath  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

## INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

## CODES & STANDARDS

Code # PTTU82: ASME A112.18.1 / CSA B125.1, IAPMO, State of MA

## PRODUCT FEATURES


Works seamlessly with Waterworks' thermostatic or diverter shower systems  
 Unrestricted flow of approximately 12 gallons per minute (GPM)



.25

PTTS82


.25 Wall Mounted Tub Spout



TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

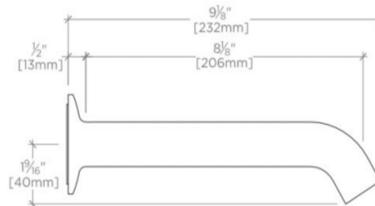

SIDE VIEW SCALE: 3"=1'-0"