


## TRANSIT

TRTF01

Transit Concealed Tub Filler with Handshower and Cross Handles

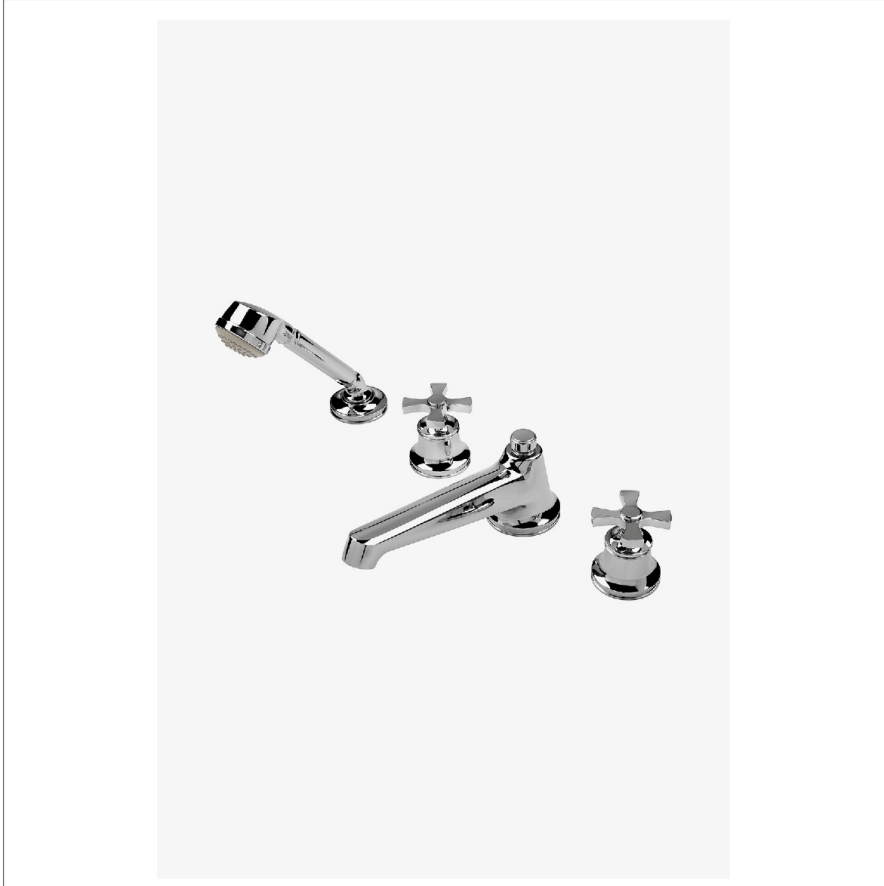

SHOWN IN TRANSIT CONCEALED TUB FILLER WITH HANDSHOWER AND CROSS HANDLES | TRTF01

### TECHNICAL DETAILS

ADA Compliance: Yes  
 Adjustable Versus Fixed Spray: Fixed Spray  
 Deck Thickness Maximum: 1 7/16"  
 Deck Thickness Minimum: 3/8"  
 Depth/Width: 9 15/16"  
 Diameter Of Head: 2 3/16"  
 Escutcheon Primary Material: Brass  
 Fittings Hole Diameter: 1 1/2"  
 Flow Restriction Options: 1.75, 1.5  
 Handle Spread Maximum: 12"  
 Handle Spread Minimum: 10"  
 Handle Turn Angle: Quarter Turn  
 Handshower Spray Hose Length: 79"  
 Height: 7 3/8"  
 Index Marking: Blank  
 Inlet Connection Size: 3/4"  
 Inlet Connection Type: Male NPT Adapter  
 Inlet Supply Spread Maximum: 12"  
 Inlet Supply Spread Minimum: 10"  
 Installation Type: Deck Mounted  
 Integrated Diverter: N  
 Integrated Spray: N  
 Length: 17 1/2"  
 Number Of Handles: Two  
 Number Of Holes: Four Hole  
 Pivot: N  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 2.0 gpm  
 Spout Swivel: N  
 Spray Included In Unit: N  
 Suggested Application: Bath  
 Valve Material: Ceramic  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

Stylish simplicity that fits into any decor. Each design represents a sophisticated mix of modern and traditional influences, streamlined into a sculpted and tapered look.

### CODES & STANDARDS

ASME A112.18.1/CSA B125.1, Waterworks Handshowers use check valves compliant to ASME A112.18.3 for backflow protection. CEC, State of MA

### PRODUCT FEATURES

Cross Handles

Diverter Knob Allows Bather to Move Water From Spout to Handshower

Handshower offers a fixed spray pattern

Stocked in Chrome, Nickel and Brass

Unrestricted Flow for Tub Spout. Handshower Available in 1.75gpm (4.5L/min) Flow Rate

### CERTIFICATIONS



### PRODUCT (NOTES)

## TRANSIT

TRTF01

Transit Concealed Tub Filler with Handshower and Cross Handles

