


REGULATOR

RGKM01

Regulator One Hole Gooseneck Bar Faucet with Black Wheel Handle

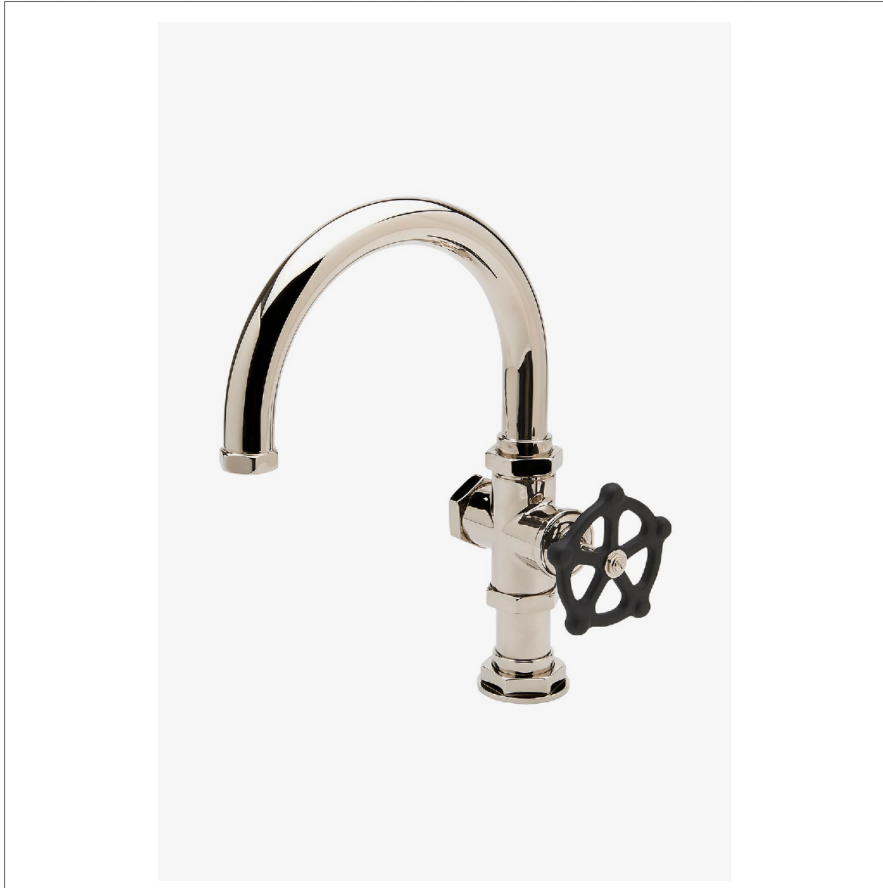

SHOWN IN REGULATOR ONE HOLE GOOSENECK BAR FAUCET WITH BLACK WHEEL HANDLE | RGKM01

TECHNICAL DETAILS

Deck Thickness Maximum: 2 1/16"
 Deck Thickness Minimum: 1/4"
 Depth/Width: 10 9/16"
 Fittings Hole Diameter: 1 3/4"
 Handle Turn Angle: Quarter Turn
 Inlet Connection Size: 3/8"
 Inlet Connection Type: Compression Connection Hoses
 Integrated Diverter: N
 Integrated Spray: N
 Length: 4 13/16"
 Restricted Maximum Flow Rate: 1.75 gpm
 Spout Swivel: Y
 Spray Included In Unit: N
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

With striking scale and unique design, Regulator commands attention through its tribute to early 20th-century boiler room controls, when pride was lavished on hard-built parts. Each handcrafted fitting brings dramatic beauty through powerful proportions and honest details.

CODES & STANDARDS

RGKM01X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Progressive Control. When the wheel handle is rotated the flow of cold water begins; continue rotating activates the mixing by adding hot water; at the end of the rotation, only hot water flows. Full rotation is a quarter turn
 8" Gooseneck Swivel Spout

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in high efficiency flow options. Contact a sales associate for details.

CERTIFICATIONS




PRODUCT (NOTES)

REGULATOR


RGKM01

Regulator One Hole Gooseneck Bar Faucet with Black Wheel Handle




TOP VIEW

SCALE: 1 1/2"=1'-0"

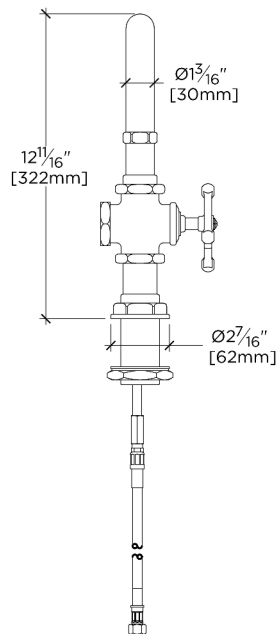

FRONT VIEW

SCALE: 1 1/2"=1'-0"

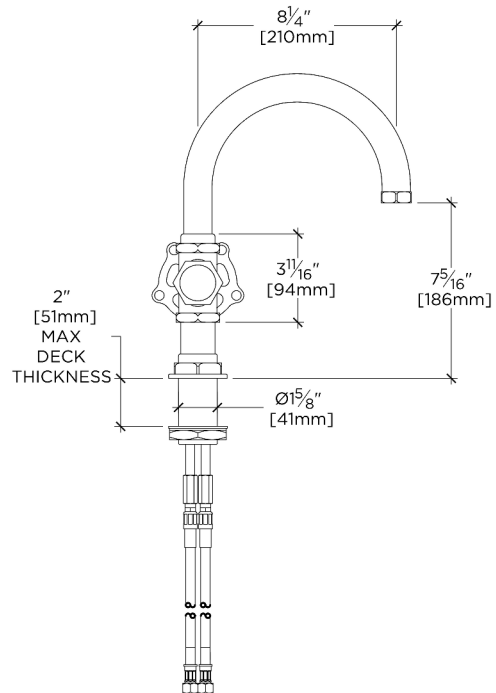

SIDE VIEW

SCALE: 1 1/2"=1'-0"