

BOULEVARD

BDS145

Boulevard 4" Showerhead with 8" Wall Mounted 45 Degree Shower Arm



SHOWN IN BOULEVARD 4" SHOWERHEAD WITH 8" WALL MOUNTED 45 DEGREE SHOWER ARM | BDS145

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Inspiration from 1930s objects evokes extravagance: a strong silhouette, lavish scale and elegant decoration. Machine and artisan hands yield crisp details and curves.

CODES & STANDARDS

BDS145X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), DOE, State of MA

PRODUCT FEATURES

- Made of Brass
- Features a swivel 4" showerhead with easy clean rubber nozzles
- Includes a 8" wall mounted 45 degree shower arm
- Stocked in Brass, Chrome, Nickel and Matte Nickel
- Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

BOULEVARD

BDS145

Boulevard 4" Showerhead with 8" Wall Mounted 45 Degree Shower Arm

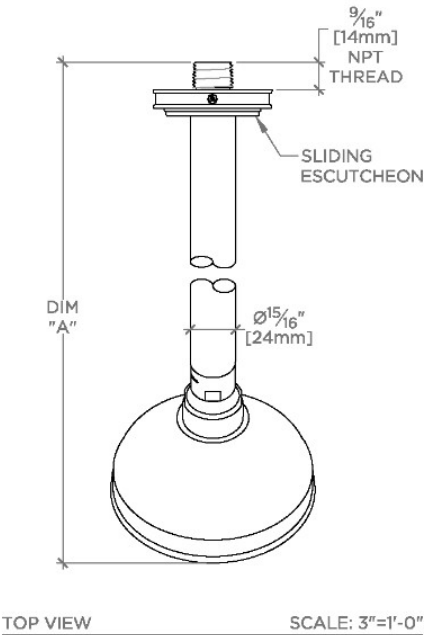

STYLE NO.	DIM "A"	DIM "B"
BDS144	10 7/16" [265mm]	6 1/4" [158mm]
BDS145	12 7/16" [315mm]	8 3/4" [209mm]

