Transit TRS345

Transit 3 1/2" Showerhead with Adjustable Spray with 8" Wall Mounted 45 Degree Shower Arm



TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Adjustable Fittings Hole Diameter: 32 mm Flow Restriction Options: 1.5, 1.75, 2.0 Inlet Connection Size: 1/2" Inlet Connection Type: Male NPT Pivot: Y Primary Material: Brass

Restricted Maximum Flow Rate: 6.6 liters/min Water Pressure Maximum: 6.0 bar

Water Pressure Minimum: 1.5 bar Water Pressure Recommended: 3.0 bar

SHOWN IN TRANSIT 3 1/2" SHOWERHEAD WITH ADJUSTABLE SPRAY WITH 8" WALL MOUNTED 45 DEGREE SHOWER ARM | TRS345

INSPIRATION

Stylish simplicity that fits into any decor. Each design represents a sophisticated mix of modern and traditional influences, streamlined into a sculpted and tapered look.

CODES & STANDARDS

TRS345X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 3 1/2" showerhead with two adjustable spray patterns

Includes a 8" wall mounted 45 degree shower arm

Stocked in Brass, Chrome and Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS







PRODUCT (NOTES)

Transit TRS345


Transit 3 1/2" Showerhead with Adjustable Spray with 8" Wall Mounted 45 Degree Shower Arm












TOP VIEW SCALE: 3"=1'-0"



SPRAY PATTERNS

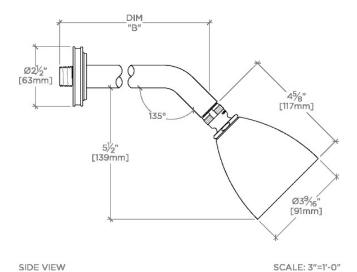

FRONT VIEW SCALE: 3"=1'-0"