

.25

PTS245

.25 4 1/4" Showerhead with 8" Wall Mounted 45 Degree Shower Arm



SHOWN IN .25 4 1/4" SHOWERHEAD WITH 8" WALL MOUNTED 45 DEGREE SHOWER ARM | PTS245

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 32 mm
Flow Restriction Options: 1.5, 1.75, 2.0
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 6.6 liters/min
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

CODES & STANDARDS

PTS245X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 4 1/4" showerhead with seven jets

Includes a 8" wall mounted 45 degree shower arm

Stocked in Brass, Chrome and Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)


.25

PTS245


.25 4 1/4" Showerhead with 8" Wall Mounted 45 Degree Shower Arm

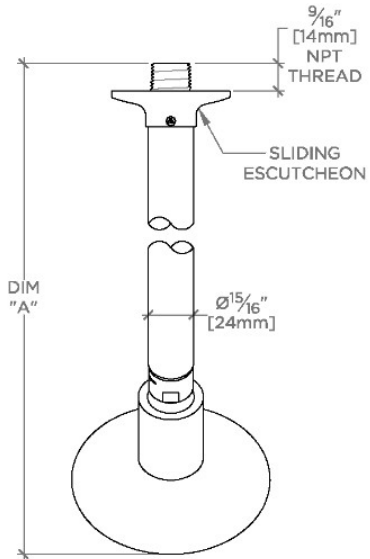

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

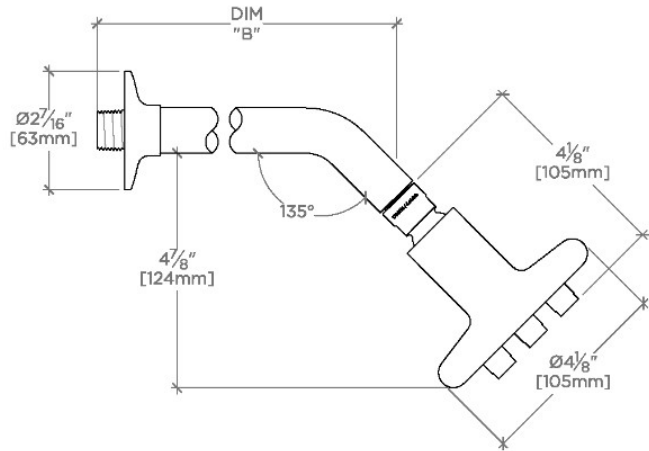

SIDE VIEW SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
LVS244	10 ³ / ₁₆ " [259mm]	6 ¹ / ₄ " [158mm]
PTS244		
LVS245	12 ³ / ₁₆ " [310mm]	8 ¹ / ₄ " [209mm]
PTS245		