
HENRY

HXT201

Henry Exposed Deck Mounted Tub Filler With Handshower and Cross Handles

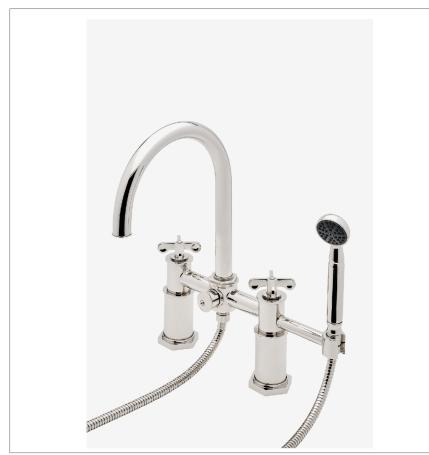

SHOWN IN HENRY EXPOSED DECK MOUNTED TUB FILLER WITH HANDSHOWER AND CROSS HANDLES | HXT201

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

TECHNICAL DETAILS

ADA Compliance: No Deck Thickness Maximum: 1 13/16" Deck Thickness Minimum: 1/4" Fittings Hole Diameter: 1 3/8" Handle Spread Maximum: 8" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Handshower Spray Hose Length: 60" Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT and Male BSPP Inlet Supply Spread Maximum: 8" Inlet Supply Spread Minimum: 8" Integrated Diverter: Y Number Of Holes: Two Hole Pivot: Y Primary Material: Brass Restricted Maximum Flow Rate: 1.75 gpm Spout Swivel: N Spray Included In Unit: Y Valve Material: Brass and Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

HXT201-F.RX, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Cross Handles

Diverter Handle Allows Bather to Move Water From Spout to Handshower

Handshower Offers a Fixed Spray Pattern, Handshower Post Can Swivel to allow user to position Handshower over the tub Unrestricted Flow for Tub Spout. Handshower Available in 1.75gpm (6.6L/min) Flow Rate CERTIFICATIONS



PRODUCT (NOTES)

HENRY

HXT201

Henry Exposed Deck Mounted Tub Filler With Handshower and Cross Handles

