

DASH

DSKM20

Dash Three Hole Gooseneck Kitchen Faucet with Metal Cross Handles and Spray



SHOWN IN DASH THREE HOLE GOOSENECK KITCHEN FAUCET WITH METAL CROSS HANDLES AND SPRAY | DSKM20

TECHNICAL DETAILS

Deck Thickness Maximum: 2 5/8"
 Deck Thickness Minimum: 1/4"
 Depth/Width: 12 5/16"
 Escutcheon Primary Material: Brass
 Fitting Hole Configuration Number: Three
 Fittings Hole Diameter: 1 3/8"
 Flow Restriction Options: 2.0, 1.75, 1.5
 Handle Spread Maximum: 12"
 Handle Spread Minimum: 8"
 Handle Turn Angle: Quarter Turn
 Handshower Spray Hose Length: 59"
 Height: 13 1/2"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male with Supply Nut
 Integrated Diverter: Y
 Integrated Spray: Y
 Number Of Holes: Four Hole
 Primary Material: Brass
 Restricted Maximum Flow Rate: 2.2 gpm
 Spray Included In Unit: Y
 Suggested Application: Bar, Kitchen, Laundry
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

An imaginative blend of art and function, Dash pays homage to design elements of the 1930s with pared-down shapes, softened curves and minimal details.

CODES & STANDARDS

DSKM20X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Pared down shapes, softened cuves and minimal details inspired by design elements from the 1930's.

10 3/8" Gooseneck swivel spout.

Cross handles.

Integrated diverter to divert water to side spray.

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in high efficiency flow options. Contact a sales associate for details.

CERTIFICATIONS




PRODUCT (NOTES)

DASH


DSKM20

Dash Three Hole Gooseneck Kitchen Faucet with Metal Cross Handles and Spray

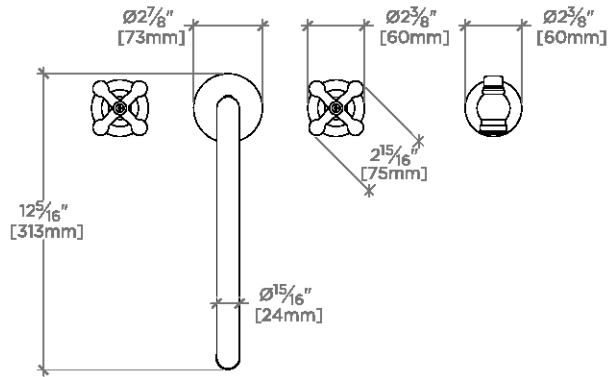


TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

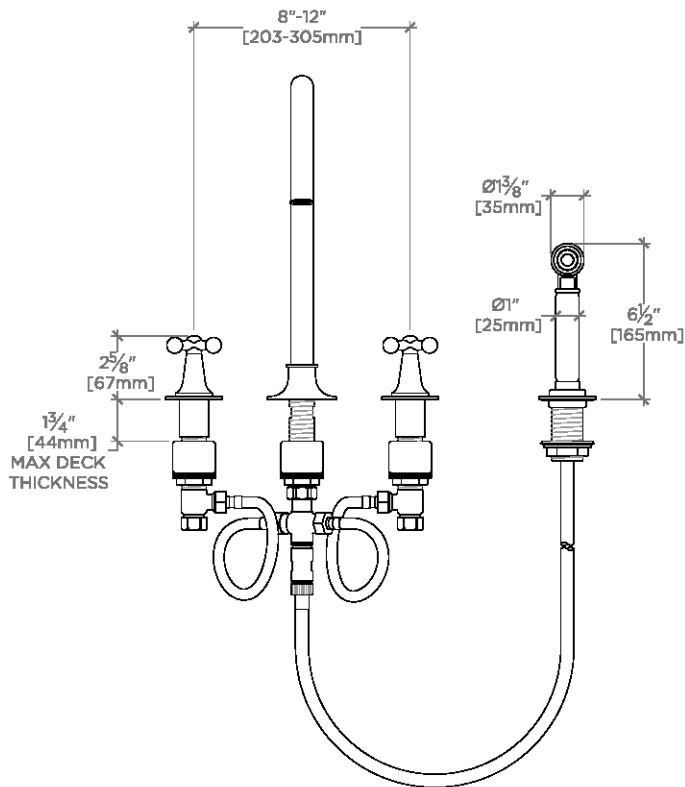

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

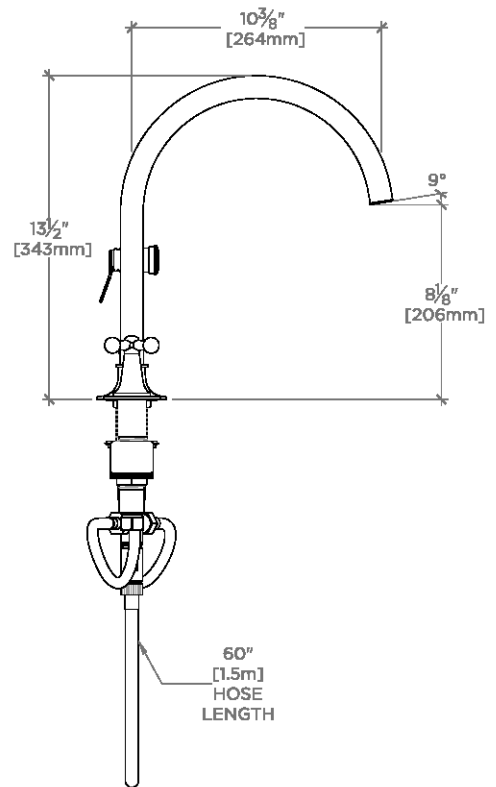

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$