

OPUS

OPS167

Opus 6" Showerhead with 12" Wall Mounted 90 Degree Shower Arm



SHOWN IN OPUS 6" SHOWERHEAD WITH 12" WALL MOUNTED 90 DEGREE SHOWER ARM | OPS167

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Flow Restriction Options: 1.5, 1.75, 2.0
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

OPS167X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 6" showerhead with easy clean rubber nozzles

Includes a 12" wall mounted 90 degree shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel


Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)


Opus 6" Showerhead with 12" Wall Mounted 90 Degree Shower Arm

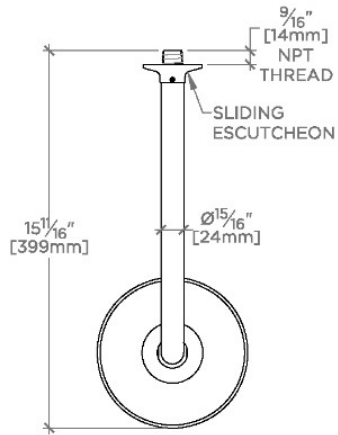

TOP VIEW SCALE: 1/2"=1'-0"

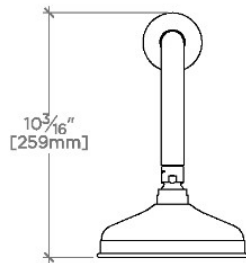

FRONT VIEW SCALE: 1/2"=1'-0"

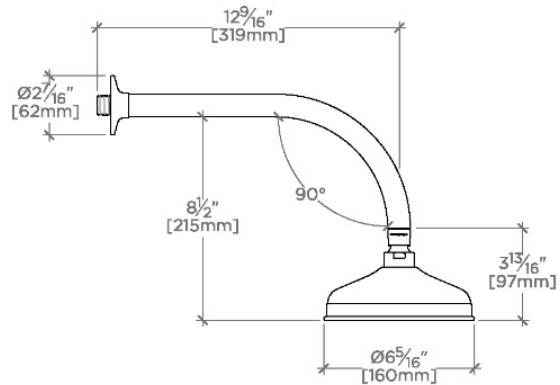

SIDE VIEW SCALE: 1/2"=1'-0"