
RIVERUN RRLS11

Riverun Lavatory Faucet with Lever Handles

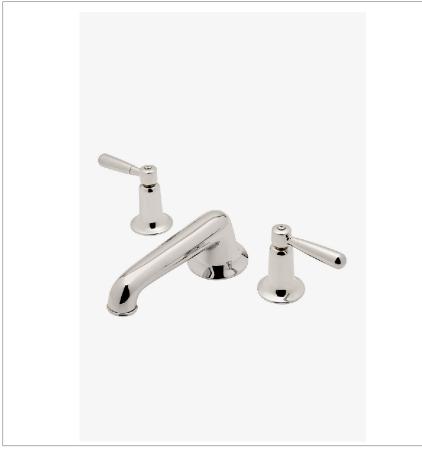

TECHNICAL DETAILS

ADA Compliance: Yes

Deck Thickness Maximum: 1 13/16" Deck Thickness Minimum: 1/4" Drain Depth Maximum: 2" Drain Depth Minimum: 3/8" Drain Hole Diameter: 1 1/2" Drain Style: Push-Touch Fittings Hole Diameter: 1 3/8" Flow Restriction Options: 1.2 Handle Spread Maximum: 12" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn

Inlet Connection Size: 1/2"

Inlet Connection Type: Male with Supply Nut Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 8"

Number Of Holes: Three Hole Primary Material: Brass

Restricted Maximum Flow Rate: 1.2 gpm

Spout Swivel: N Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

Shown in Riverun Lavatory faucet with lever handles \mid RRLS11

INSPIRATION

This new American classic was designed with simplicity in mind. Featuring streamlined forms and honest details, it?s the epitome of quiet elegance.

CODES & STANDARDS

RRLS11X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, DOE, State of MA

PRODUCT FEATURES

Features All Metal Lever Handles

Includes a Universal Push Touch Drain sized to fit US and Euro sink drain openings.

Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS





PRODUCT (NOTES)

RIVERUN RRLS11

Riverun Lavatory Faucet with Lever Handles

