

## Universal

USH110

Universal Classic 10" Rain Showerhead



SHOWN IN UNIVERSAL CLASSIC 10" RAIN SHOWERHEAD | USH110

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray  
 Flow Restriction Options: 1.5, 1.75, 2.0  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Female NPT  
 Pivot: Y  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 6.6 liters/min  
 Water Pressure Maximum: 6.0 bar  
 Water Pressure Minimum: 1.5 bar  
 Water Pressure Recommended: 3.0 bar

### INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

### CODES & STANDARDS

USH110X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

### PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 10" rain showerhead

127 easy clean rubber nozzles prevent calcium buildup

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

### CERTIFICATIONS




### PRODUCT (NOTES)

## Universal


USH110

Universal Classic 10" Rain Showerhead

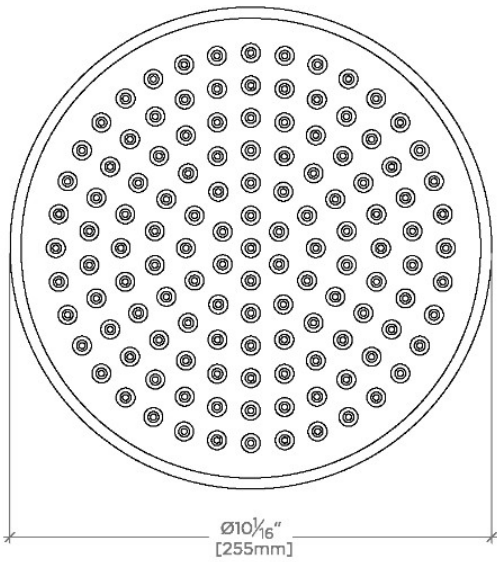


CEILING VIEW

SCALE: 3"=1'-0"

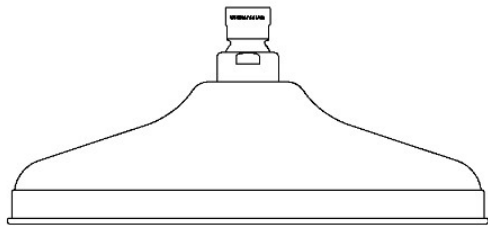

FRONT VIEW

SCALE: 3"=1'-0"

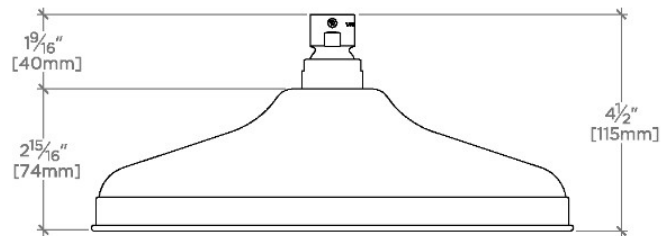

SIDE VIEW

SCALE: 3"=1'-0"