

## Universal

## USH112

Universal Classic 12" Rain Showerhead



SHOWN IN UNIVERSAL CLASSIC 12" RAIN SHOWERHEAD | USH112

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray  
 Flow Restriction Options: 1.5, 1.75, 2.0  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Female NPT  
 Pivot: Y  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 6.6 liters/min  
 Water Pressure Maximum: 6.0 bar  
 Water Pressure Minimum: 1.5 bar  
 Water Pressure Recommended: 3.0 bar

### INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

### CODES & STANDARDS

USH112X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

### PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 12" rain showerhead

157 easy clean rubber nozzles prevent calcium buildup


Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


### CERTIFICATIONS




### PRODUCT (NOTES)

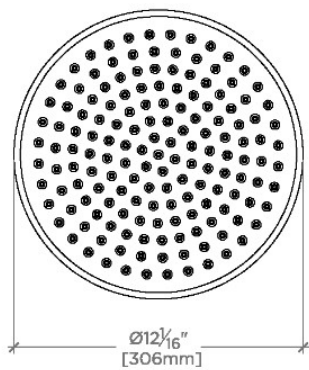

CEILING VIEW SCALE:  $1\frac{1}{2}"=1'-0"$



FRONT VIEW SCALE:  $1\frac{1}{2}"=1'-0"$

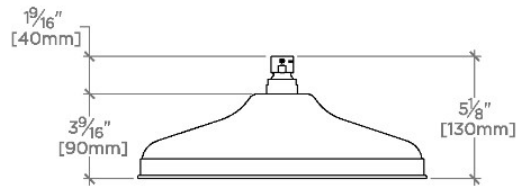

SIDE VIEW SCALE:  $1\frac{1}{2}"=1'-0"$