

ViaWorks 3/4" Thermostatic Valve



SHOWN IN VIAWORKS 3/4" THERMOSTATIC VALVE | GU37TH

TECHNICAL DETAILS

Depth/Width: 89 mm
Fittings Hole Diameter: 133 mm
Height: 133 mm
Inlet Connection Size: 3/4"
Inlet Connection Type: Female G/BSPP
Length: 165 mm
Outlet Connection Size: 3/4"
Outlet Connection Type: Female G/BSPP
Primary Material: Brass
Suggested Application: Bath
Valve Material: Bi-metal strip
Water Pressure Maximum: 5.5 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

The ViaWorks collection encompasses all Waterworks valves, which are just as impeccably engineered as our legendary fittings and the finest the industry has to offer in terms of performance, features and functionality. ViaWorks valves are engineered with more than three generations of bath and kitchen expertise, each with installers and lifelong service in mind.

CODES & STANDARDS

Code # : ASME A112.18.1 / CSA B125.1, CSA, State of Ma

PRODUCT FEATURES

Integrated anti-scald protection.

3/4" inlet and outlet connections.

16 gpm (gallons per minute) unrestricted maximum flow at 60 psi


Unique flush plate to clear construction debris before thermostatic cartridge is installed

Made in Europe of Brass Construction

CERTIFICATIONS


PRODUCT (NOTES)

ViaWorks 3/4" Thermostatic Valve

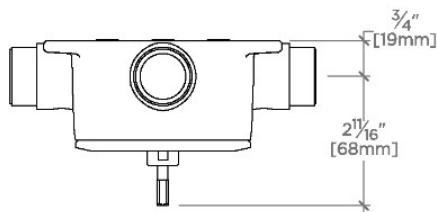


TOP VIEW

SCALE: 3"=1'-0"

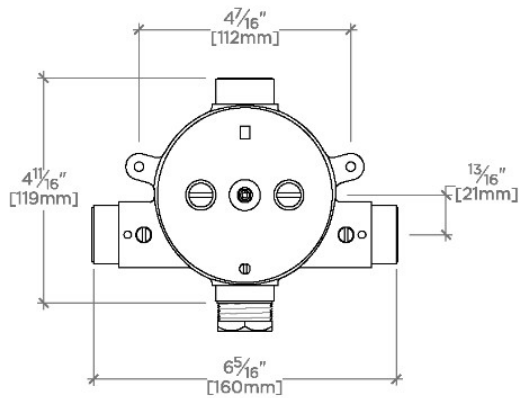

FRONT VIEW

SCALE: 3"=1'-0"



SIDE VIEW

SCALE: 3"=1'-0"