


Boulevard

BDS144

Boulevard 4" Showerhead with 6" Wall Mounted 45 Degree Shower Arm

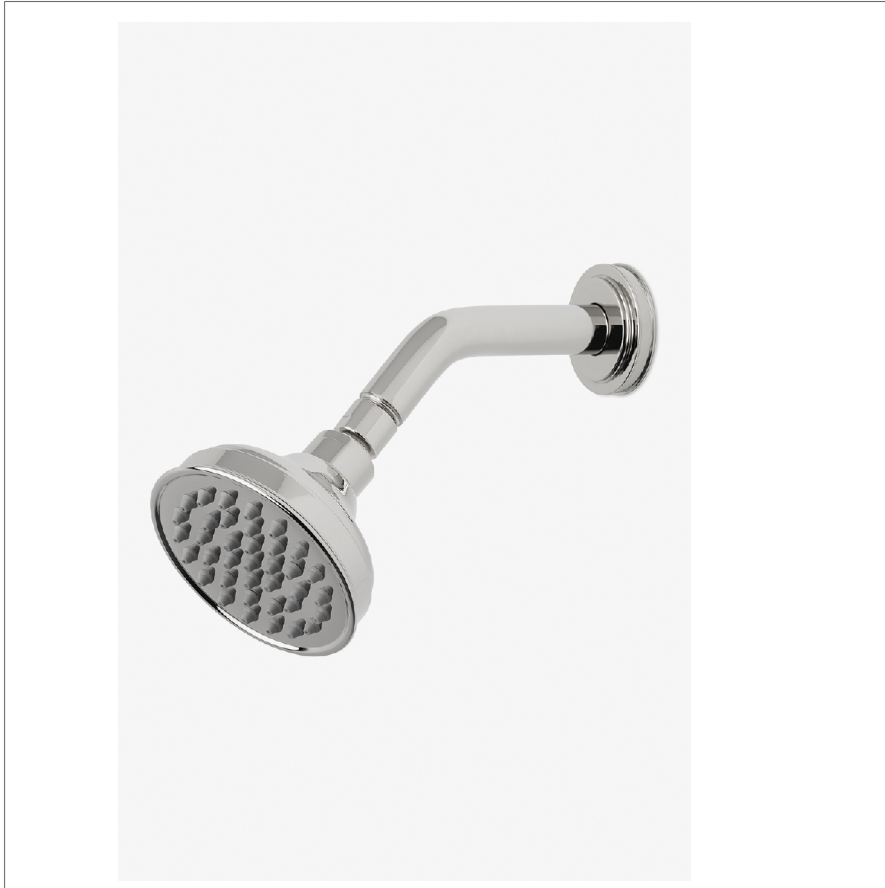

SHOWN IN BOULEVARD 4" SHOWERHEAD WITH 6" WALL MOUNTED 45 DEGREE SHOWER ARM | BDS144

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
 Fittings Hole Diameter: 32 mm
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male NPT
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 6.6 liters/min
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Inspiration from 1930s objects evokes extravagance: a strong silhouette, lavish scale and elegant decoration. Machine and artisan hands yield crisp details and curves.

CODES & STANDARDS

BDS144X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), DOE, State of MA

PRODUCT FEATURES

- Made of Brass
- Features a swivel 4" showerhead with easy clean rubber nozzles
- Includes a 6" wall mounted 45 degree shower arm
- Stocked in Brass, Chrome, Nickel and Matte Nickel
- Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

Boulevard

BDS144

Boulevard 4" Showerhead with 6" Wall Mounted 45 Degree Shower Arm

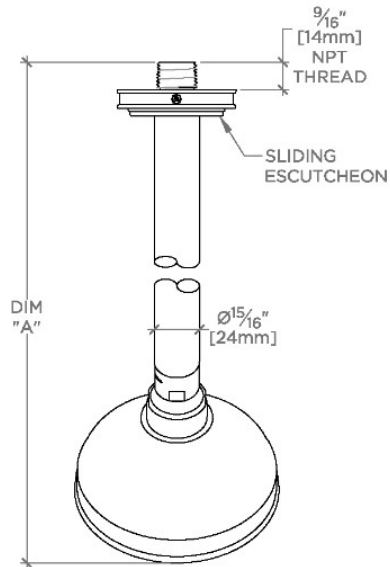

STYLE NO.	DIM "A"	DIM "B"
BDS144	10 ⁷ / ₁₆ " [265mm]	6 ³ / ₄ " [158mm]
BDS145	12 ⁷ / ₁₆ " [315mm]	8 ³ / ₄ " [209mm]

