


HIGHGATE

Highgate Gooseneck Lavatory Faucet with Cross Handles

HGLS20

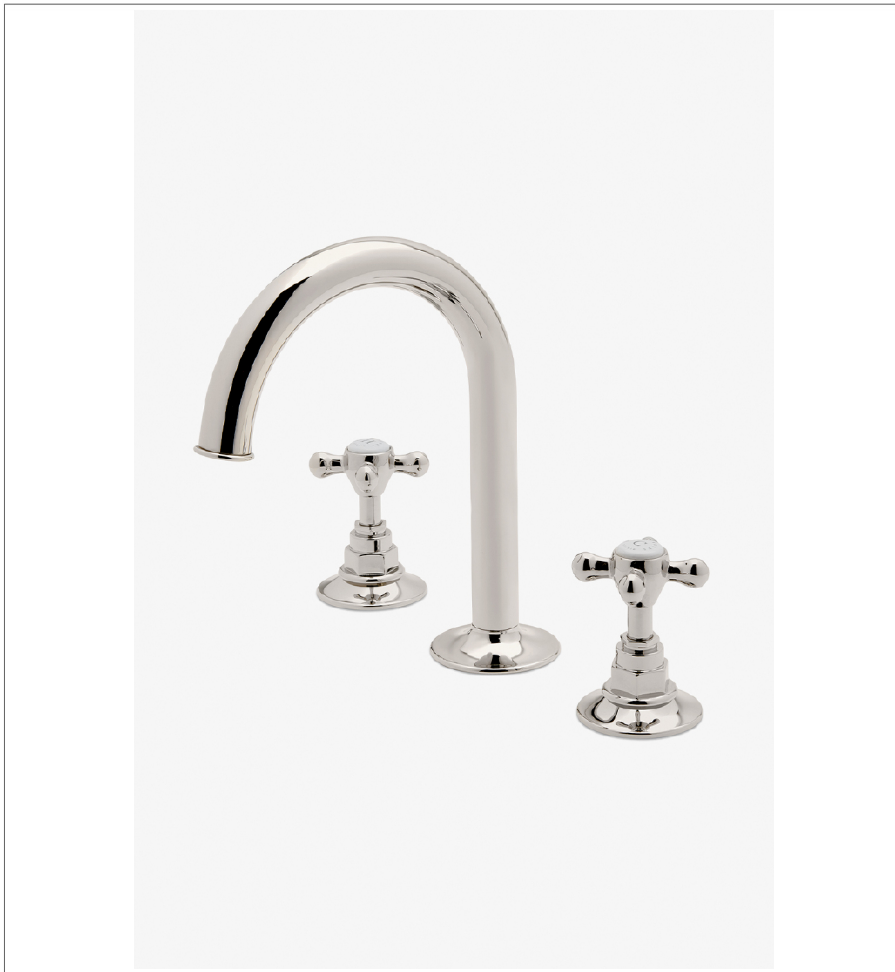

SHOWN IN Highgate Gooseneck Lavatory Faucet with Cross Handles in Nickel

TECHNICAL DETAILS

ADA Compliance:

Adjustable versus Fixed Spray:

Deck Thickness Maximum: 1.5625

Deck Thickness Minimum: 0.375

Drain Depth Maximum:

Drain Hole Diameter: 1.5

Depth / Width:

Escutcheon Primary Material:

Fittings Hole Diameter: 1.375

Handle Spread Maximum: 12.0

Handle Spread Minimum: 8.0

Handle Turn Angle: Quarter Turn

Drain Depth Minimum: 1.375

Height:

Inlet Connection Size: 0.5

Inlet Connection Type: Male with Supply Nut

Inlet Supply Spread Maximum: 12.0

Inlet Supply Spread Minimum: 8.0

Installation Type:

Integrated Diverter:

Integrated Spray:

Number of Handles:

Number of Holes:

Primary Material:

Spout Swivel:

Spray Included in Unit:

Suggested Application:

Valve Material: Ceramic

Water Pressure Maximum: 85.0

Water Pressure Minimum: 20.0

Water Pressure Recommended: 45.0

INSPIRATION

Our take on old English style: simple, functional shapes, detailed with white porcelain indices and hexagonal accents for a timeless feel.

CODES & STANDARDS

PRODUCT FEATURES

Cross Handles.

Includes USA size lift and turn drain.

Stocked in Chrome, Nickel and Brass.


Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS

HIGHGATE


Highgate Gooseneck Lavatory Faucet with Cross Handles

HGLS20

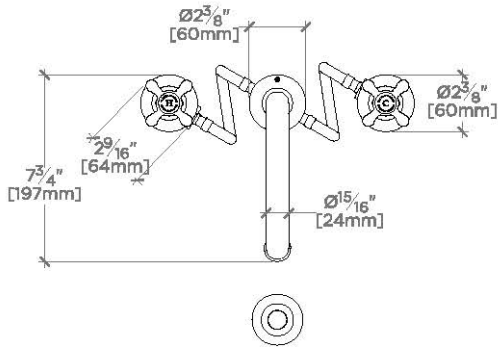


TOP VIEW

SCALE: 1 1/2"=1'-0"




ISO VIEW

SCALE: 1 1/2"=1'-0"

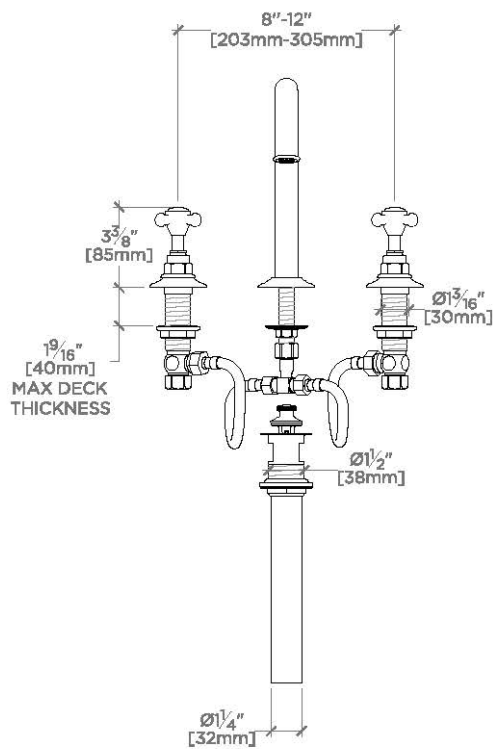

FRONT VIEW

SCALE: 1 1/2"=1'-0"

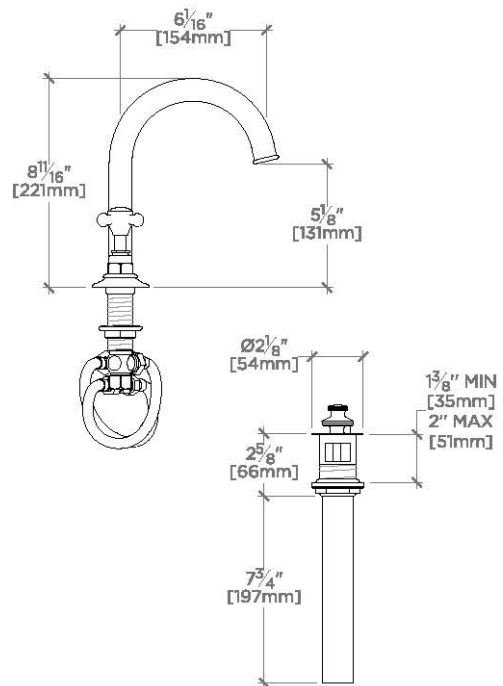

SIDE VIEW

SCALE: 1 1/2"=1'-0"