


STYLE No. XLWC01

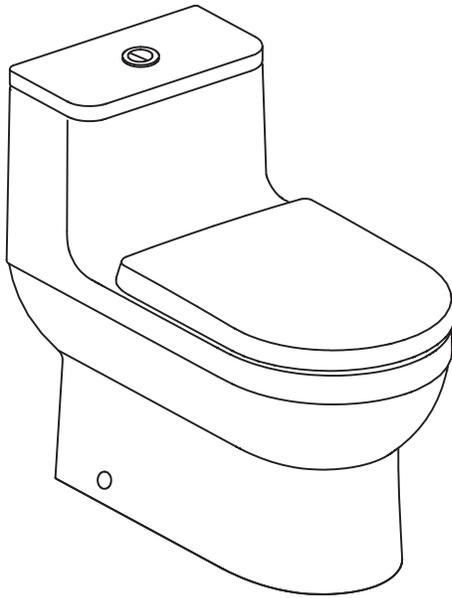

SPECIFICATIONS:

Bolt Cap Material: Plastic
Flush Motion: Push
Flush Position: Top of Lid
Flushing Technology: Dual Flush
Gallons per Flush (Left Button): 1.0Gpf [3.8 Lpf]
Gallons per Flush (Right Button): 1.6Gpf [6.1 Lpf]
Inlet Connection - Fill Valve: 1/2" Male Threads † ‡
Seat Height: 17" [431mm]

† The fill valve requires a female 3/8" compression x female 1/2" IPS x 12" length braided stainless steel faucet supply line (not supplied). The supply line must be attached to the valve prior to setting the watercloset.

‡ A 1/2" Female x 7/8" male adapter and gasket for the fill valve is provided. This would require a female 3/8" compression x female 7/8" ballcock nut x 12" length braided stainless steel toilet connector (not supplied). The toilet connector must be attached to the valve prior to setting the watercloset.

IMPORTANT:

- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- This product must be installed by a professional licensed contractor. Be sure your installation conforms to all federal, state, and local codes.
- This product must be on-site prior to rough-in. This allows the installer to visualize the installation and verify dimensions.
- Inspect the product to ensure you have all the parts required for proper installation.

ROUGH-IN:

1. Install adequate blocking to properly secure the WASTE ADAPTER and MOUNTING BRACKETS. The BRACKETS will hold the WATERCLOSET in place.
2. Install waste piping and supply valve (not included), see Figure - 01.

NOTE: The FILL VALVE is located on the right side of the watercloset.

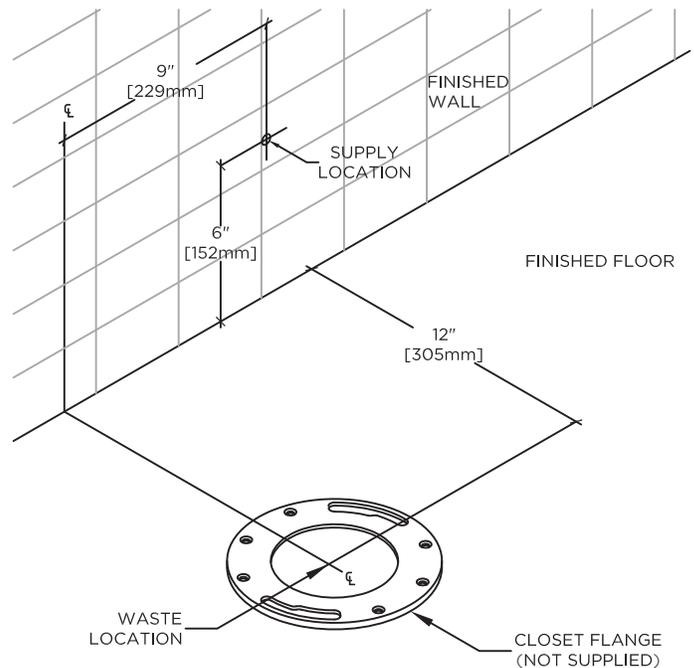


FIGURE - 01

These guidelines have been prepared for the professional contractor to aid in the installation of:
AXEL ONE PIECE DUAL FLUSH WATERCLOSET (STYLE No. XLWC01).
All dimensions are based on original specification and are subject to change and variation.
Please consult your Design Associate for current specifications.

WATERWORKS
STUDIO

- See Figure - 02 for Steps 03 - 05.
- 3. Dry fit the WASTE ADAPTER over the CLOSET FLANGE (not supplied) and mark the location for the ANCHORS.
- 4. Remove the ADAPTER and install the ANCHORS, LAG SCREWS, CLOSET BOLTS and WASHERS.
- 5. Place the WAX SEAL over the CLOSET FLANGE (not supplied) and install the WASTE ADAPTER. Secure the ADAPTER to the floor using the NUTS and WASHERS provided.

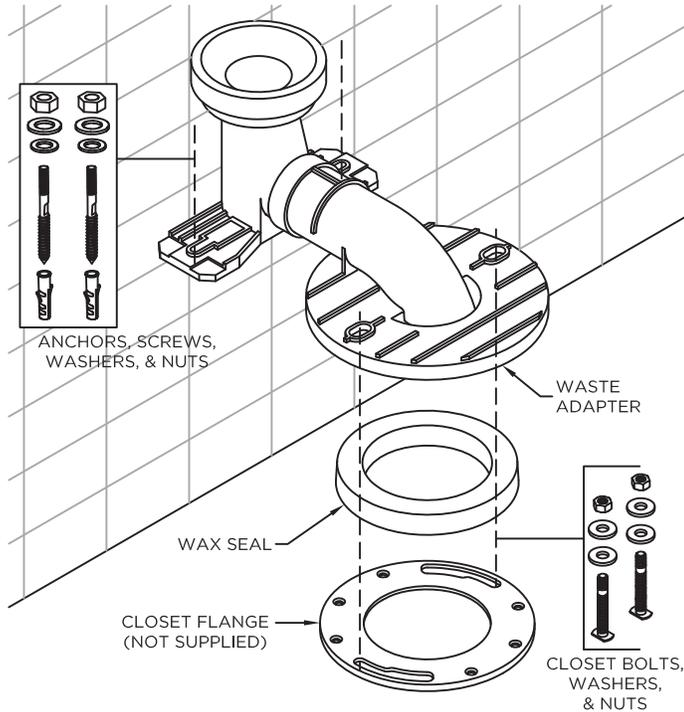


FIGURE - 02

- 6. Dry fit the WATERCLOSET to the WASTE ADAPTER and mark the location of the MOUNTING HOLES. See Figure - 03.



FIGURE - 03

- 7. Remove the WATERCLOSET, dry-fit the MOUNTING BRACKETS and measure the center spread. See Figure - 04.

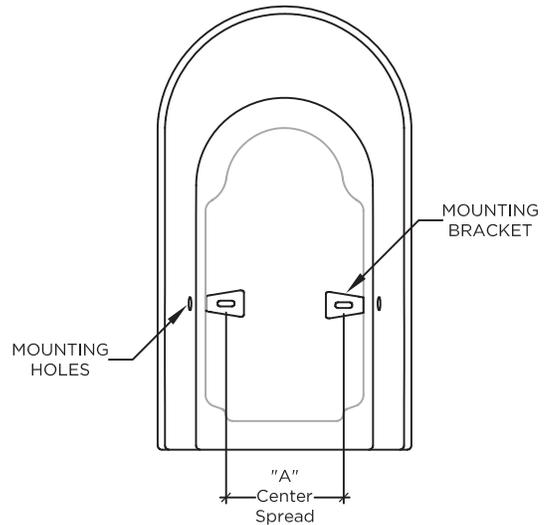


FIGURE - 04

- 8. Install the MOUNTING BRACKETS based on the markings made in STEP 6 and the spread dimension measured in STEP 7. See Figure - 05.

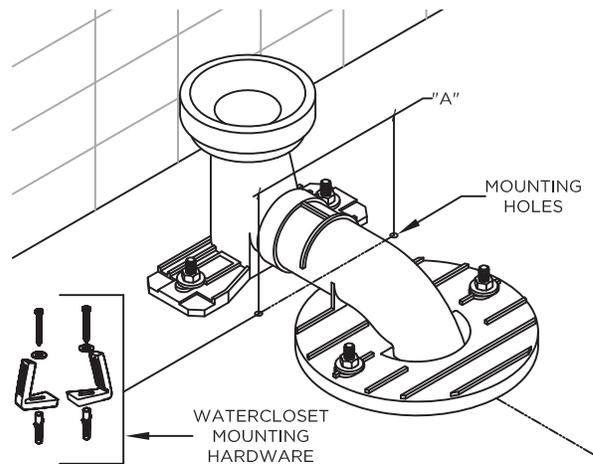


FIGURE - 05

- 9. Connect a 12" length braided stainless steel 3/8" compression x 1/2" IPS faucet supply line (not supplied) or a 12" length braided stainless steel 3/8" compression x 7/8" ballcock nut toilet connector (not supplied) to the FILL VALVE.

NOTE: The FILL VALVE has a 1/2" male inlet connection and requires the provided 1/2" female x 7/8" male ADAPTER and GASKET.

- 10. Install the WATERCLOSET onto the WASTE ADAPTER and secure it to the MOUNTING BRACKETS using the HARDWARE provided. See Figure - 06.

These guidelines have been prepared for the professional contractor to aid in the installation of: **AXEL ONE PIECE DUAL FLUSH WATERCLOSET (STYLE No.XLWCO1).** All dimensions are based on original specification and are subject to change and variation. Please consult your Design Associate for current specifications.

WATERWORKS
STUDIO

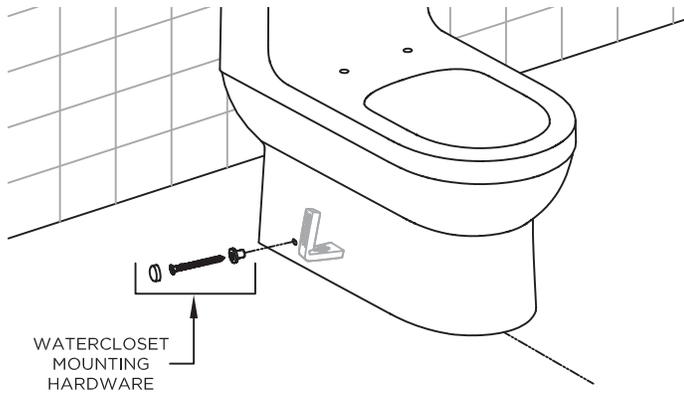


FIGURE - 06

11. Connect the supply line or toilet connector to the SUPPLY VALVE (not supplied).
12. Install the TANK LID.
 - A list of service parts can be found on the underside of the TANK LID.
13. Turn on the water and operate the FLUSH VALVE to make sure the WATERCLOSET is functioning properly.
14. Inspect the installation for leaks.
15. Install the SEAT using the HARDWARE provided. See Figure - 07.

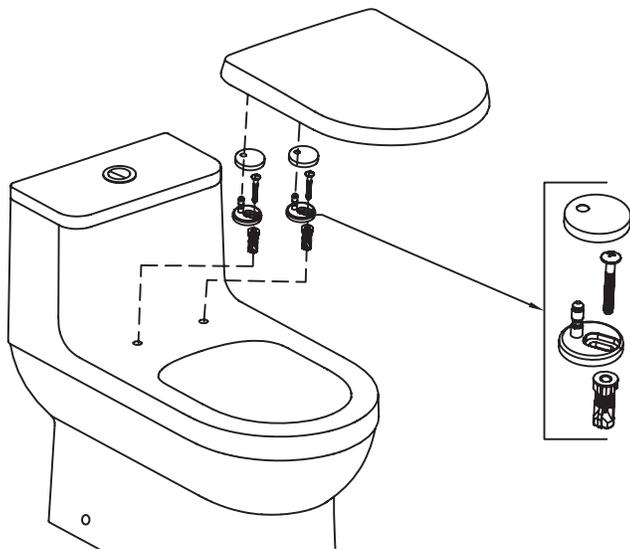


FIGURE - 07

SERVICE PARTS:

- See Figure - 08 for available Service Parts.
- ++ Supplied as a pair.

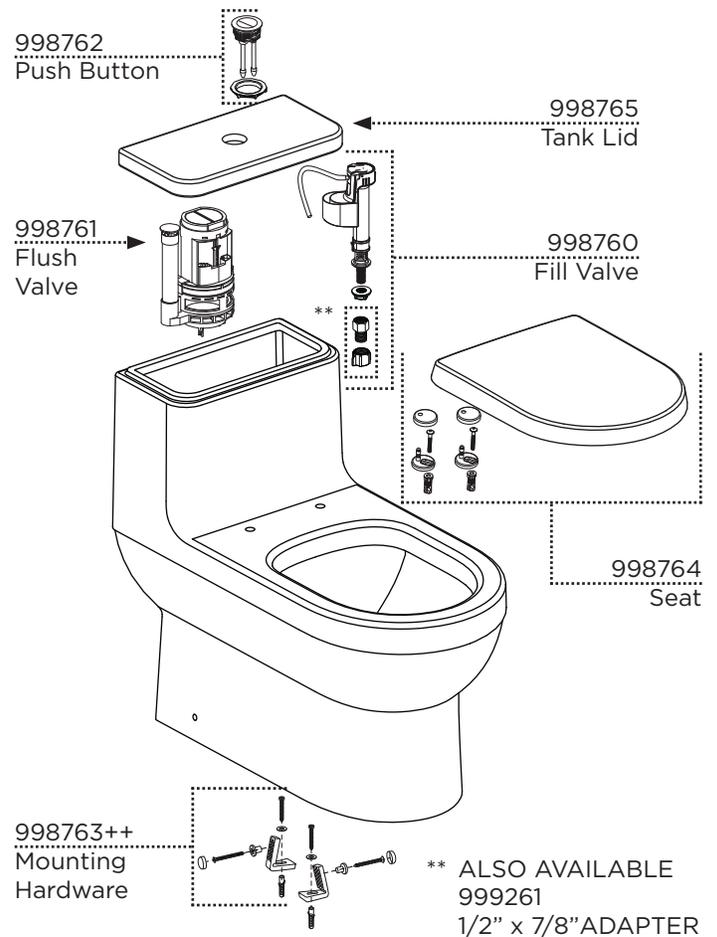


FIGURE - 08

- If further assistance is required, please contact Product Support at 1-800-927-2120 Monday through Friday, 8am - 7pm EST.

These guidelines have been prepared for the professional contractor to aid in the installation of:
AXEL ONE PIECE DUAL FLUSH WATERCLOSET (STYLE No.XLWC01).
 All dimensions are based on original specification and are subject to change and variation.
 Please consult your Design Associate for current specifications.

WATERWORKS
STUDIO