

## .25

## PTS201

.25 10" Rain Showerhead with 12" Ceiling Mounted Shower Arm



SHOWN IN .25 10" RAIN SHOWERHEAD WITH 12" CEILING MOUNTED SHOWER ARM | PTS201

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed  
 Fittings Hole Diameter: 32 mm  
 Flow Restriction Options: 1.5, 1.75, 2.0  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Male NPT  
 Pivot: Y  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 6.6 liters/min  
 Water Pressure Maximum: 6.0 bar  
 Water Pressure Minimum: 1.5 bar  
 Water Pressure Recommended: 3.0 bar

### INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

### CODES & STANDARDS

PTS201X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

### PRODUCT FEATURES

- Made of Brass
- Features a swivel 10" rain showerhead with easy clean rubber nozzles
- Includes a 12" ceiling mounted shower arm
- Stocked in Brass, Chrome, Nickel and Matte Nickel
- Rain showerhead available in 1.75gpm (6.6L/min) flow rate

### CERTIFICATIONS




### PRODUCT (NOTES)

**.25**

**PTS201**


.25 10" Rain Showerhead with 12" Ceiling Mounted Shower Arm

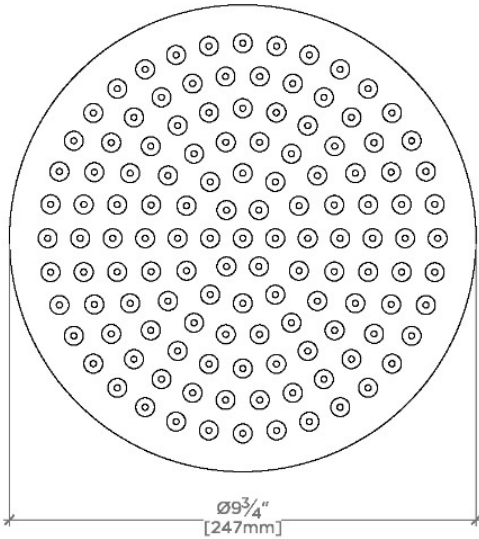

CEILING VIEW


SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
LVS200	10 <sup>5</sup> / <sub>16</sub> " [261mm]	6 <sup>9</sup> / <sub>16</sub> " [167mm]
PTS200		
LVS201	16 <sup>5</sup> / <sub>16</sub> " [414mm]	12 <sup>9</sup> / <sub>16</sub> " [319mm]
PTS201		
LVS202	22 <sup>5</sup> / <sub>16</sub> " [566mm]	18 <sup>9</sup> / <sub>16</sub> " [472mm]
PTS202		

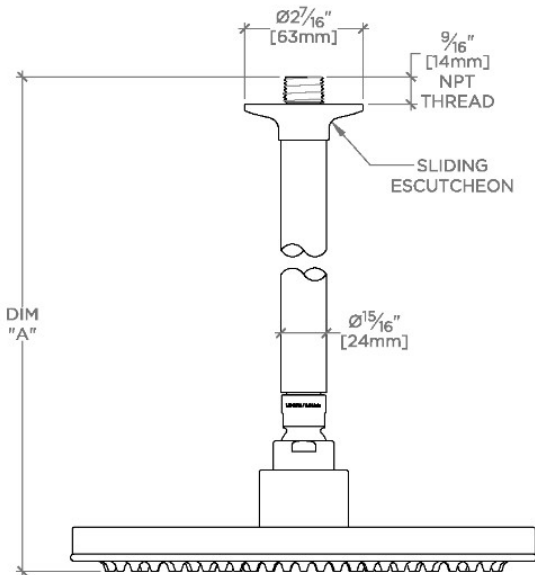

FRONT VIEW

SCALE: 3"=1'-0"

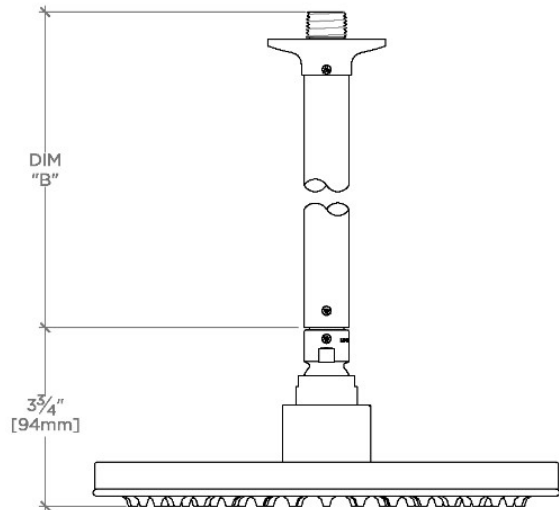

SIDE VIEW

SCALE: 3"=1'-0"