

Universal

USH212

Universal Modern 12" Rain Showerhead



SHOWN IN UNIVERSAL MODERN 12" RAIN SHOWERHEAD | USH212

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray
 Flow Restriction Options: 1.5, 1.75, 2.0
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female NPT
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 6.6 liters/min
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

USH212X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 12" rain showerhead

157 easy clean rubber nozzles prevent calcium buildup


Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS




PRODUCT (NOTES)

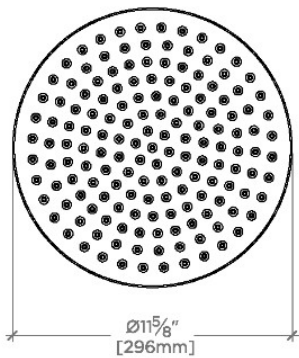

CEILING VIEW SCALE: $\frac{1}{2}"=1'-0"$



FRONT VIEW SCALE: $\frac{1}{2}"=1'-0"$

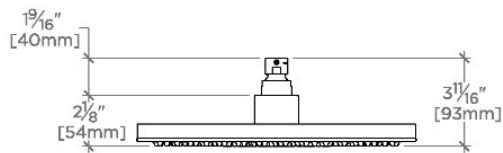

SIDE VIEW

SCALE: $\frac{1}{2}"=1'-0"$