

## Universal

USH409

Universal Specialty 8 1/2" Rain Showerhead with Exposed Slotted Screws



SHOWN IN UNIVERSAL SPECIALTY 8 1/2" RAIN SHOWERHEAD WITH EXPOSED SLOTTED SCREWS | USH409

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray  
 Flow Restriction Options: 1.5, 1.75, 2.0  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Female NPT  
 Pivot: Y  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 6.6 liters/min  
 Water Pressure Maximum: 6.0 bar  
 Water Pressure Minimum: 1.5 bar  
 Water Pressure Recommended: 3.0 bar

### INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

### CODES & STANDARDS

USH409X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

### PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 8 1/2" rain showerhead

91 easy clean rubber nozzles prevent calcium buildup

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

### CERTIFICATIONS




### PRODUCT (NOTES)


## Universal

USH409


Universal Specialty 8 1/2" Rain Showerhead with Exposed Slotted Screws

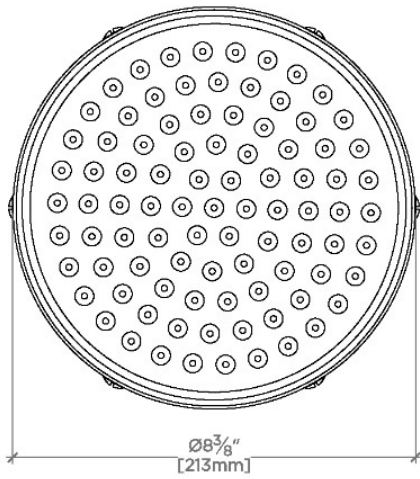

CEILING VIEW SCALE: 3"=1'-0"

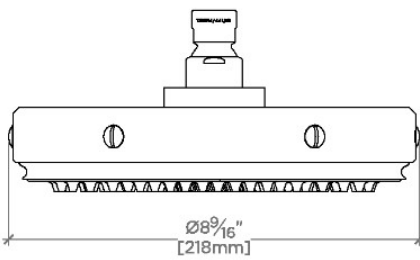

FRONT VIEW SCALE: 3"=1'-0"

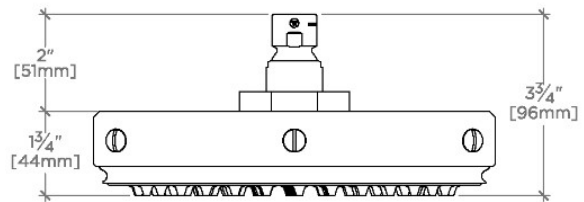

SIDE VIEW SCALE: 3"=1'-0"