


## HENRY CHRONOS

CKM514

Henry Chronos Gooseneck Integrated Pull Spray Kitchen Faucet with Walnut Lever Handle

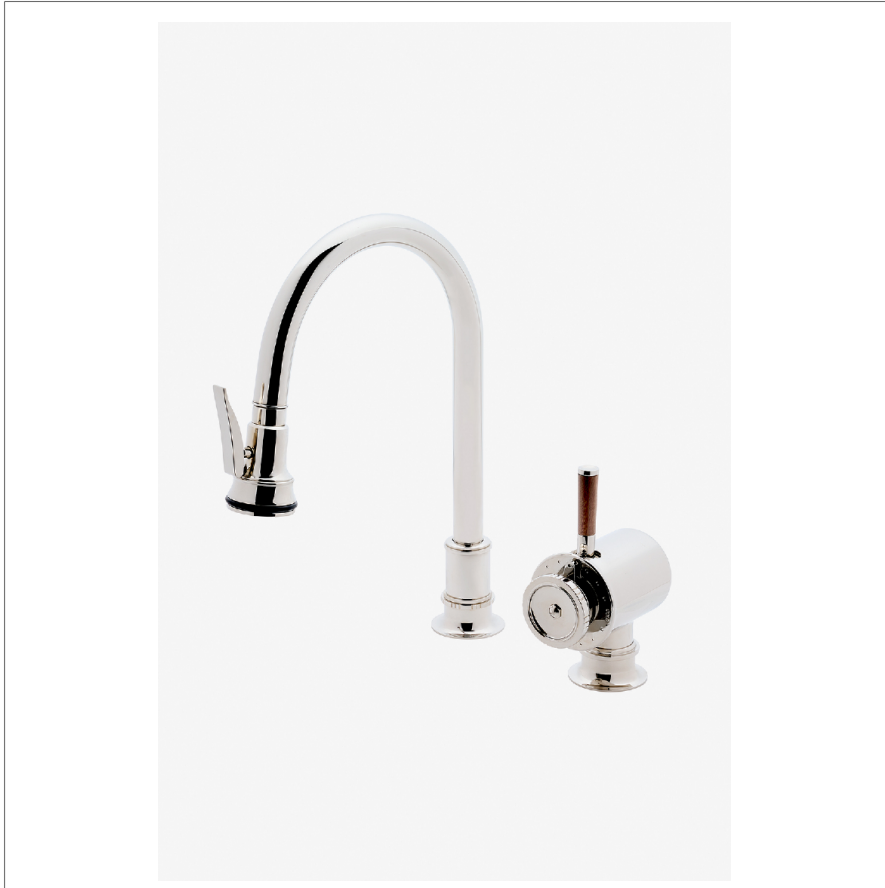

SHOWN IN HENRY CHRONOS GOOSENECK INTEGRATED PULL SPRAY KITCHEN FAUCET WITH WALNUT LEVER HANDLE | CKM514

### TECHNICAL DETAILS

ADA Compliance: Yes  
 Adjustable Versus Fixed Spray: Adjustable Spray  
 Deck Thickness Maximum: 1 9/16"  
 Fittings Hole Diameter: 1 1/2"  
 Handshower Spray Hose Length: 59"  
 Inlet Connection Size: 3/8"  
 Inlet Connection Type: Compression Connection Hoses  
 Restricted Maximum Flow Rate: 1.75 gpm  
 Spout Swivel: Y  
 Spray Included In Unit: Y  
 Valve Material: Brass and Ceramic  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

Inspired by dive watches, Henry Chronos radiates design prowess and technical precision. Chronos retains the design integrity of our original, iconic Henry collection, while imbuing it with modern details and exquisite materials.

### CODES & STANDARDS

CKM514X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1

### PRODUCT FEATURES

Features Lever Handle

Stocked in Chrome, Nickel, and Brass

Available in 1.75 gpm (6.6 L/min) flow rate

Features thermostatic temperature control, desired temperature can be preset by using the center wheel handle

Pull-down sprayhead with dual function, allows the use to switch between aerated stream and jet spray

### CERTIFICATIONS




### PRODUCT (NOTES)

# WATERWORKS

## HENRY CHRONOS


CKM514

Henry Chronos Gooseneck Integrated Pull Spray Kitchen Faucet with Walnut Lever Handle


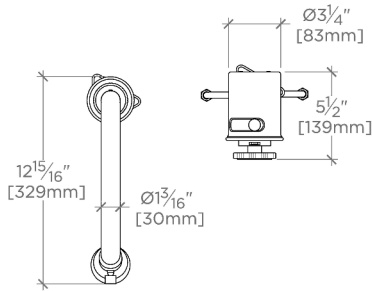


TOP VIEW

SCALE: 1"=1'-0"

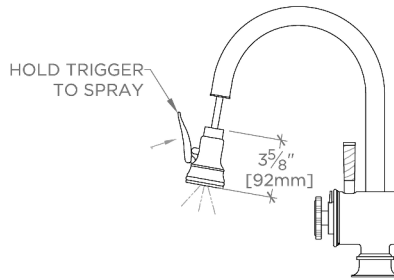


HANDLE OPERATION

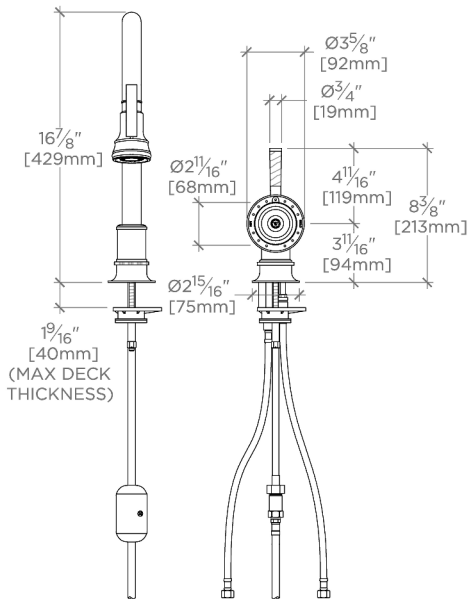

FRONT VIEW


SCALE: 1"=1'-0"

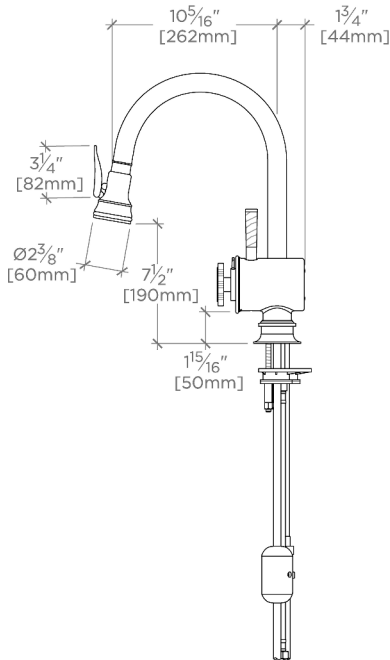

SIDE VIEW

SCALE: 1"=1'-0"

NOTE:  
ADAPTER AND GASKET  
(x2) INCLUDED -  
INTERNATIONAL USE  
ONLY

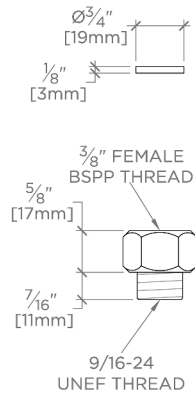

NOT TO SCALE