


Flyte Gooseneck Lavatory Faucet with Lever Handles

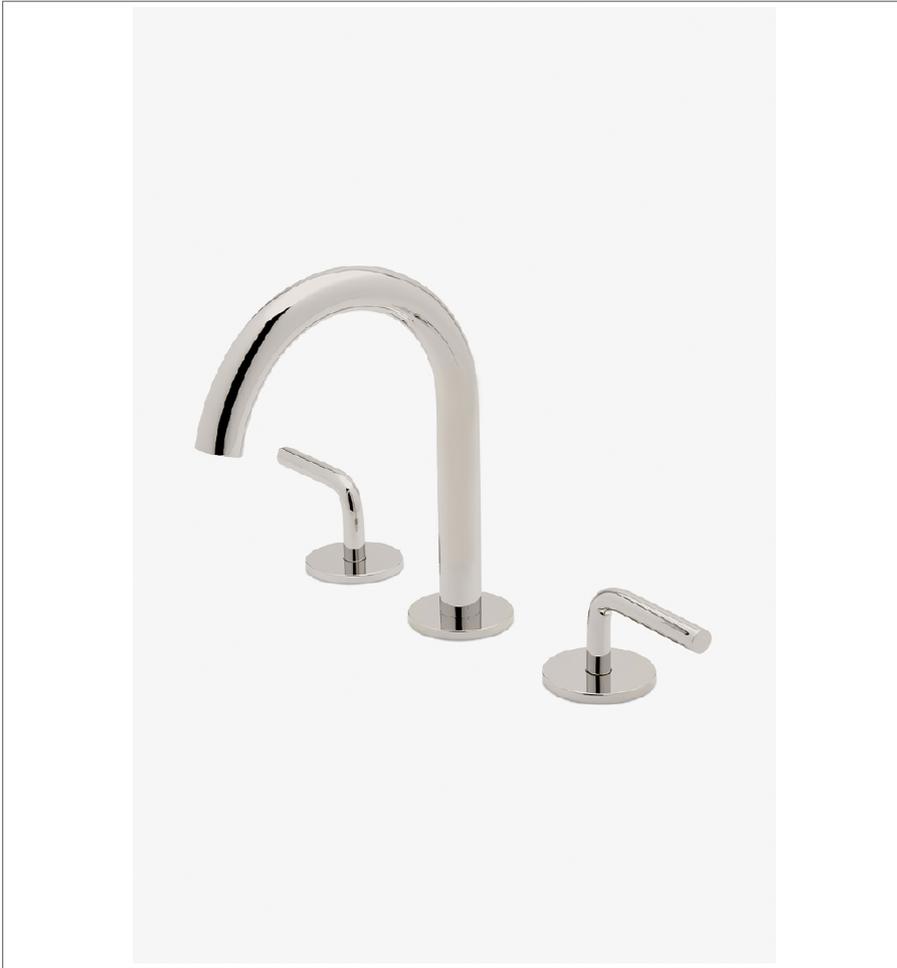

SHOWN IN Flyte Gooseneck Lavatory Faucet with Lever Handles in Nickel

### TECHNICAL DETAILS

ADA Compliance:  
 Adjustable versus Fixed Spray:  
 Deck Thickness Maximum: 1.625  
 Deck Thickness Minimum: 0.25  
 Drain Depth Maximum:  
 Drain Hole Diameter: 1.5  
 Depth / Width:  
 Escutcheon Primary Material:  
 Fittings Hole Diameter: 1.375  
 Handle Spread Maximum: 12.0  
 Handle Spread Minimum: 8.0  
 Handle Turn Angle: Quarter Turn  
 Drain Depth Minimum: 0.375  
 Height:  
 Inlet Connection Size: 0.5  
 Inlet Connection Type: Male with Supply Nut  
 Inlet Supply Spread Maximum: 12.0  
 Inlet Supply Spread Minimum: 8.0  
 Installation Type:  
 Integrated Diverter:  
 Integrated Spray:  
 Number of Handles:  
 Number of Holes:  
 Primary Material:  
 Spout Swivel:  
 Spray Included in Unit:  
 Suggested Application:  
 Valve Material: Ceramic  
 Water Pressure Maximum: 85.0  
 Water Pressure Minimum: 20.0  
 Water Pressure Recommended: 45.0

### INSPIRATION

Pure Modernism. Like minimalist works of art, the elegant proportions of these light, fluid elements bring sculptural reference to a room.

### CODES & STANDARDS

### PRODUCT FEATURES

Lever Handles

Includes universal size push touch drain

Stocked in Chrome, Nickel and Matte Black

Available in 1.2gpm (4.5L/min) flow rate


### CERTIFICATIONS

# WATERWORKS

FLYTE


FLLS30

Flyte Gooseneck Lavatory Faucet with Lever Handles

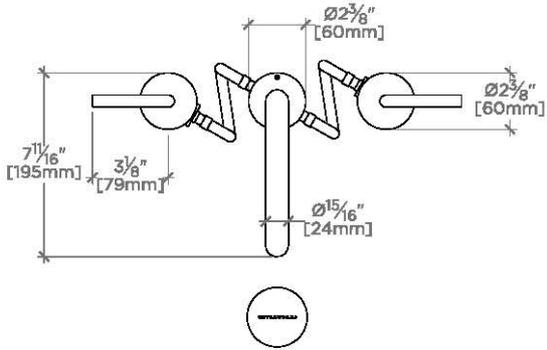


TOP VIEW

SCALE: 1 1/2"=1'-0"




ISO VIEW

SCALE: 1 1/2"=1'-0"

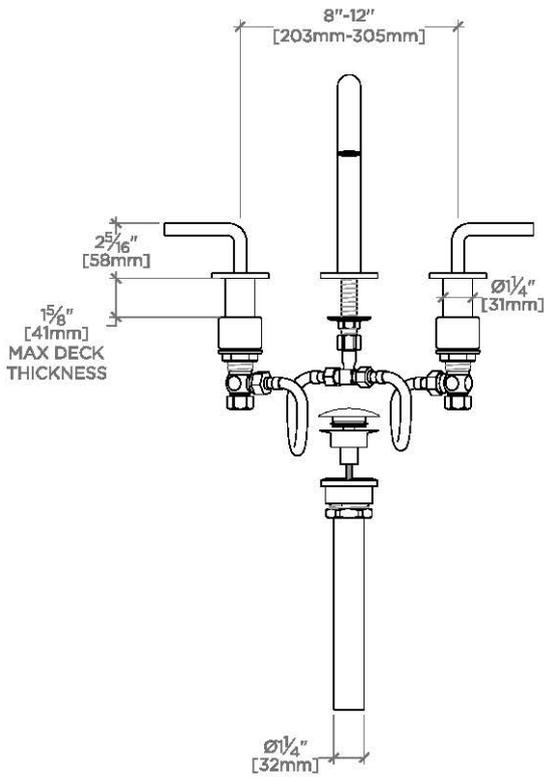

FRONT VIEW

SCALE: 1 1/2"=1'-0"

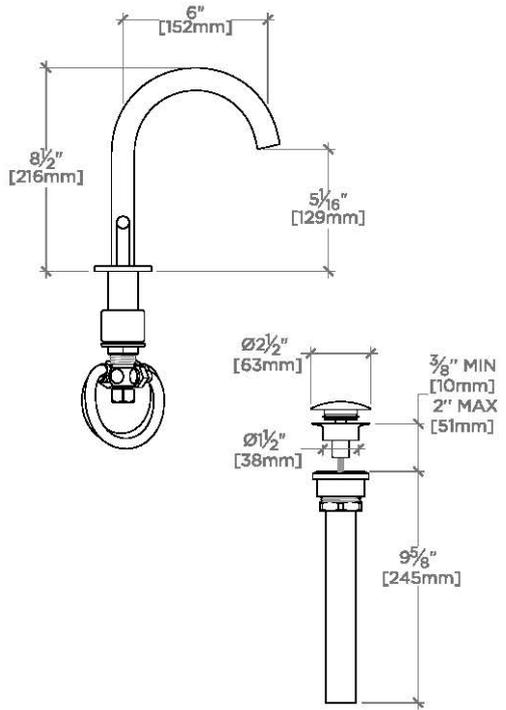

SIDE VIEW

SCALE: 1 1/2"=1'-0"