


## OPUS

## OPS144

Opus 4" Showerhead with 6" Wall Mounted 45 Degree Shower Arm

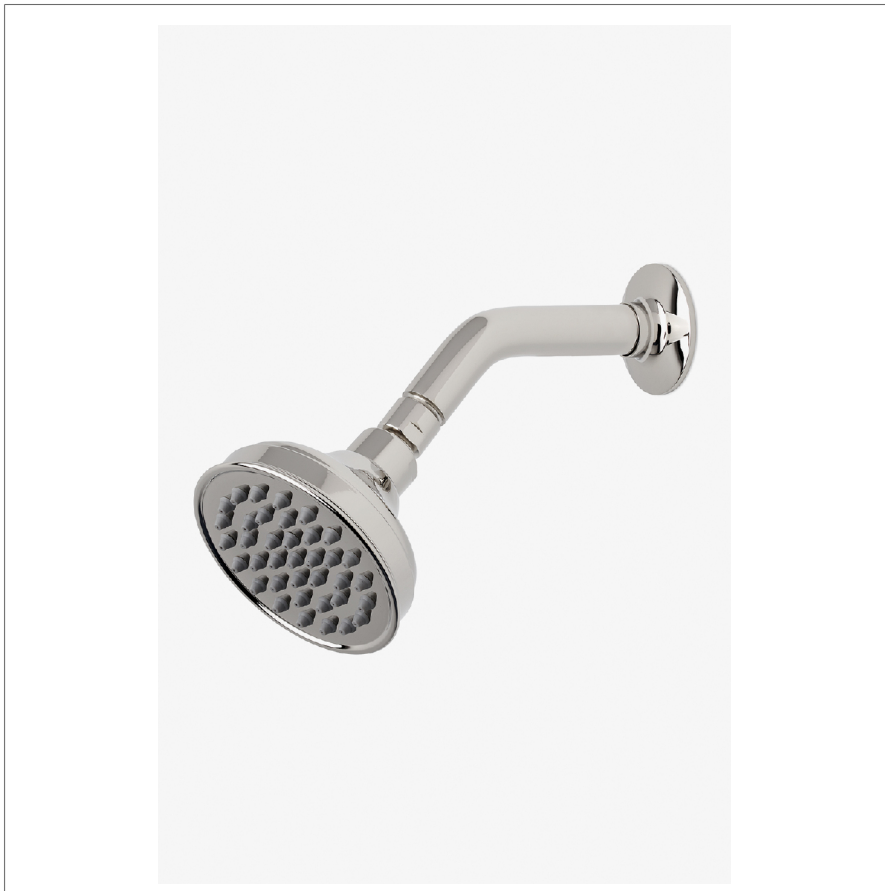

SHOWN IN OPUS 4" SHOWERHEAD WITH 6" WALL MOUNTED 45 DEGREE SHOWER ARM | OPS144

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed  
Fittings Hole Diameter: 1 1/4"  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Male NPT  
Pivot: Y  
Primary Material: Brass  
Restricted Maximum Flow Rate: 1.75 gpm  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

### CODES & STANDARDS

OPS144X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), DOE, State of MA

### PRODUCT FEATURES

Made of Brass

Features a swivel 4" showerhead with easy clean rubber nozzles

Includes a 6" wall mounted 45 degree shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate

### CERTIFICATIONS




### PRODUCT (NOTES)

## OPUS

## OPS144

Opus 4" Showerhead with 6" Wall Mounted 45 Degree Shower Arm

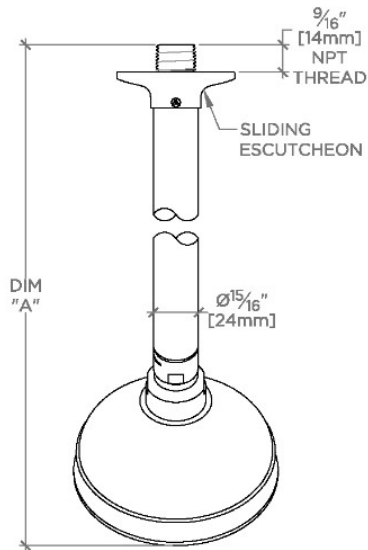

STYLE NO.	DIM "A"	DIM "B"
EAS144	10 <sup>7</sup> / <sub>16</sub> " [265mm]	6 <sup>1</sup> / <sub>4</sub> " [158mm]
OPS144		
EAS145	12 <sup>7</sup> / <sub>16</sub> " [316mm]	8 <sup>1</sup> / <sub>4</sub> " [209mm]
OPS145		

