


## Flyte

FLLS50

Flyte One Hole Lavatory Faucet with Lever Handle

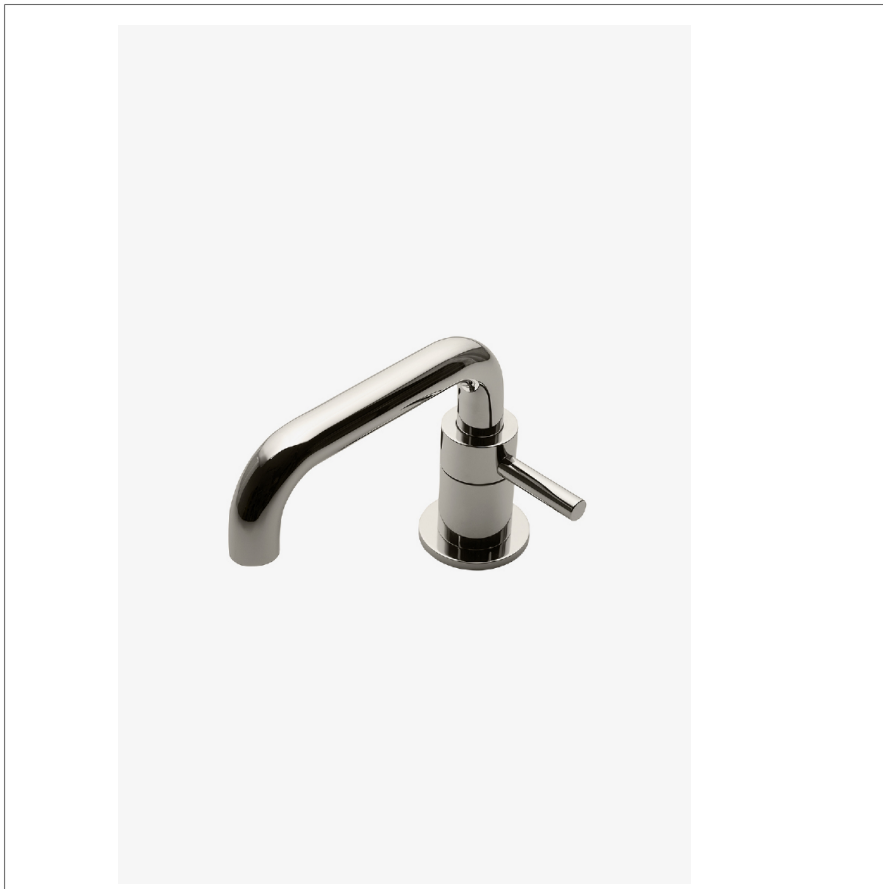

SHOWN IN FLYTE ONE HOLE LAVATORY FAUCET WITH LEVER HANDLE | FLLS50

### TECHNICAL DETAILS

ADA Compliance: Yes  
 Adjustable Versus Fixed Spray: Fixed Spray  
 Deck Thickness Maximum: 97 mm  
 Deck Thickness Minimum: 0 mm  
 Depth/Width: 194 mm  
 Drain Depth Maximum: 51 mm  
 Drain Depth Minimum: 32 mm  
 Drain Hole Diameter: 38 mm  
 Escutcheon Primary Material: Brass  
 Fittings Hole Diameter: 35 mm  
 Flow Restriction Options: 1.2  
 Handle Turn Angle: Half Turn  
 Height: 149 mm  
 Inlet Connection Size: 3/8"  
 Inlet Connection Type: Compression Connector  
 Hoses  
 Installation Type: Deck Mounted  
 Integrated Diverter: N  
 Integrated Spray: N  
 Length: 387 mm  
 Number Of Handles: One  
 Number Of Holes: One Hole  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 4.5 liters/min  
 Spout Swivel: N  
 Spray Included In Unit: N  
 Suggested Application: Bath  
 Valve Material: Ceramic  
 Water Pressure Maximum: 6.0 bar  
 Water Pressure Minimum: 1.5 bar  
 Water Pressure Recommended: 3.0 bar

### INSPIRATION

Pure Modernism. Like minimalist works of art, the elegant proportions of these light, fluid elements bring sculptural reference to a room.

### CODES & STANDARDS

FLLS50X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

### PRODUCT FEATURES

Lever Handle

Includes Universal Push-Touch Drain (UNLD23) which fits 1-1/2" through 1-3/4" drain hole openings

Stocked in Chrome, Nickel, Brass and Matte Black

Available in 1.2gpm (4.5L/min) flow rate

### CERTIFICATIONS



### PRODUCT (NOTES)

## Flyte

FLLS50

Flyte One Hole Lavatory Faucet with Lever Handle

