

## OPUS

OPS122

Opus 12" Rain Showerhead with 18" Ceiling Mounted Shower Arm



SHOWN IN OPUS 12" RAIN SHOWERHEAD WITH 18" CEILING MOUNTED SHOWER ARM | OPS122

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed  
 Fittings Hole Diameter: 1 1/4"  
 Flow Restriction Options: 1.5, 1.75, 2.0  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Male NPT  
 Pivot: Y  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 1.75 gpm  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

### CODES & STANDARDS

OPS122X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

### PRODUCT FEATURES

- Made of Brass
- Features a swivel 12" rain showerhead with easy clean rubber nozzles
- Includes an 18" ceiling mounted shower arm
- Stocked in Brass, Chrome, Nickel and Matte Nickel
- Rain showerhead available in 1.75gpm (6.6L/min) flow rate

### CERTIFICATIONS




### PRODUCT (NOTES)

# WATERWORKS

## OPUS

## OPS122


Opus 12" Rain Showerhead with 18" Ceiling Mounted Shower Arm

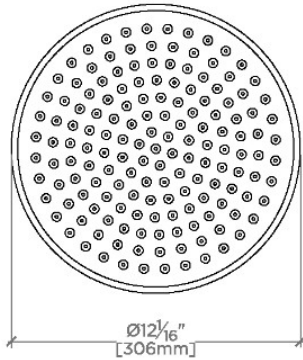

CEILING VIEW


SCALE: 1/2"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
EAS120	11 <sup>1</sup> / <sub>16</sub> "	6 <sup>9</sup> / <sub>16</sub> "
OPS120	[297mm]	[166mm]
EAS121	17 <sup>3</sup> / <sub>4</sub> "	12 <sup>9</sup> / <sub>16</sub> "
OPS121	[450mm]	[319mm]
EAS122	23 <sup>3</sup> / <sub>4</sub> "	18 <sup>9</sup> / <sub>16</sub> "
OPS122	[603mm]	[472mm]

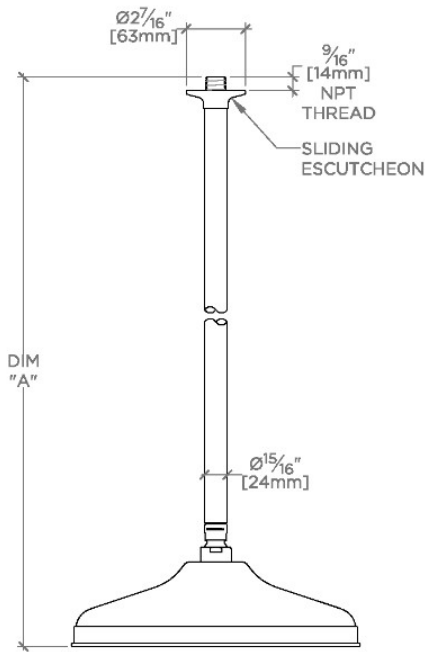

FRONT VIEW

SCALE: 1/2"=1'-0"

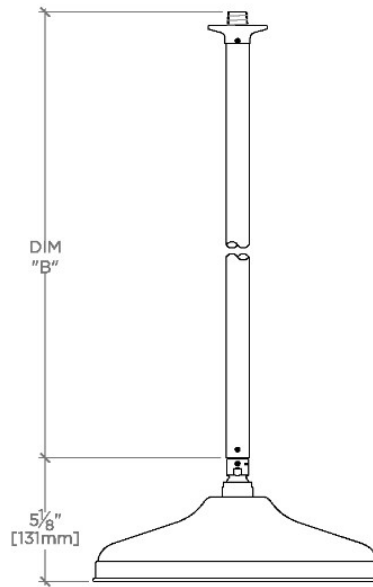

SIDE VIEW

SCALE: 1/2"=1'-0"