



ESTB. 1978

WATERWORKS

Claypaper



Painterly, fluid brushstrokes wash over Claypaper tile. Each piece is hand-painted in soft colors, creating a gentle and varied artistic effect that partners well with many other surfaces.



ESTB. 1978

WATERWORKS

Claypaper

HANDMADE FIELD TILE



3" x 3" **



3" Hexagon **



4 1/4" Hexagon **



3" x 6" *



6" x 6" *



3" x 12" *



6" x 12" *

*Note: Coordinating bullnose available

**Note: Handmade field tile can be tape faced for an additional charge



ESTB. 1978

WATERWORKS

Claypaper

HANDMADE MOSAICS



2" Hexagon Mosaic



2" x 2" Stacked Mosaic



2" x 2" Staggered Mosaic



1 1/4" x 2 3/8" Stacked Mosaic



1 1/4" x 2 3/8" Staggered Mosaic



ESTB. 1978

WATERWORKS

Claypaper


TRIM



Devon Rail
1 7/8" x 6"



Belmont Rail
3" x 6"



Everett Base
4 3/4" x 6"



Quarter Round
1" x 6"



Standard Liner
1/2" x 6"



ESTB. 1978

WATERWORKS

Claypaper


PALETTE



Sea Glossy Wash V4-5



Indigo Glossy Wash V4-5



Breeze Glossy Wash V4-5



Pewter Glossy Wash V4-5



Cocoa Glossy Wash V4-5



Sage Glossy Wash V4-5



Nickel Glossy Wash V4-5



Egret Glossy Solid V2



Talc Glossy Solid V2


* See variation chart on page 7



ESTB. 1978

WATERWORKS

Claypaper

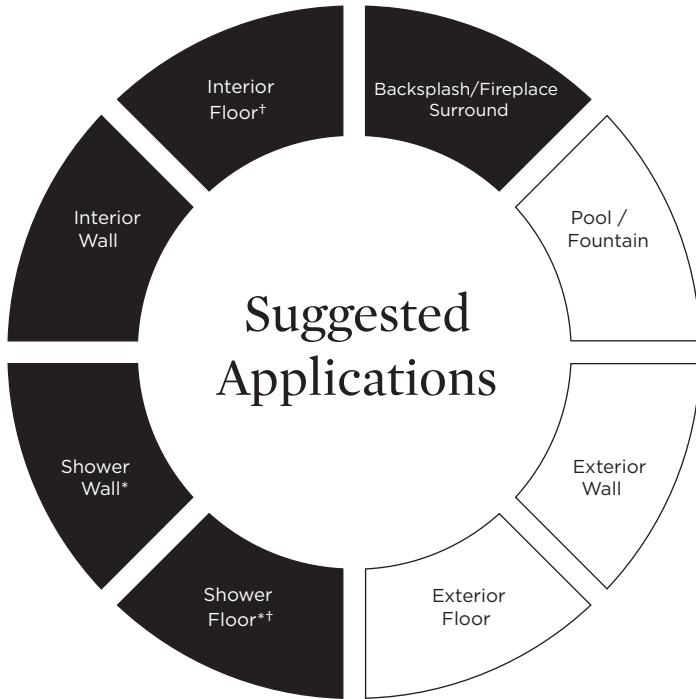

● Recommended Use ○ Not Recommended Use

Application Notes

* Suitable for use in wet environments, if properly installed, sealed, and maintained

† Small format field tile and mosaics

Variation Level

V1	V2	V3	V4-5	V5

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness

$\frac{3}{8}''^*$

*Nominal: +/- $\frac{1}{8}''$

Suggested Grout Lines

$\frac{1}{16}'' - \frac{1}{8}''$

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Seal tile PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials.
- Re-seal tile and grout after installation and maintain regularly.