
**BOND** BLS73S

Bond Rally Series Wall Mounted Lavatory Faucet with Knob Handles

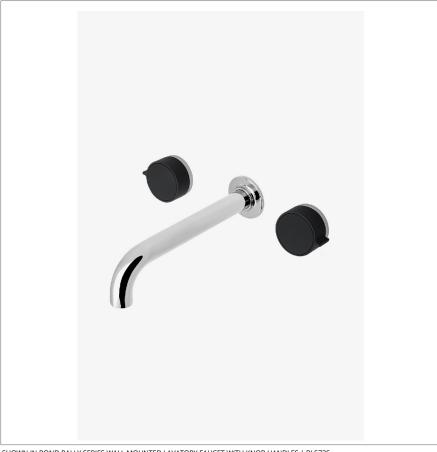

### **TECHNICAL DETAILS**

ADA Compliance: Yes Drain Depth Maximum: 2 5/8" Drain Depth Minimum: 3/8" Drain Hole Diameter: 1 3/4" Drain Style: Push Touch Fittings Hole Diameter: 1 3/8" Handle Spread Maximum: 8" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Each Way Inlet Connection Size: 1/2" Inlet Connection Type: Female NPT Number Of Holes: Three Hole Primary Material: Brass

Restricted Maximum Flow Rate: 1.2 gpm

Spout Swivel: N

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN BOND RALLY SERIES WALL MOUNTED LAVATORY FAUCET WITH KNOB HANDLES | BLS73S

### **INSPIRATION**

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

### **CODES & STANDARDS**

BLS73SX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, DOE, State of MA

## **PRODUCT FEATURES**

**Knob Handles** 

Includes Universal Push-Touch Drain (UNLD23) which fits 1-1/2" through 1-3/4" drain hole openings

Features a Sport Black Finish, smooth and velvety to the touch

Stocked in Chrome/Sport Black

Available in 1.2gpm (4.5L/min) flow rate; Requires valve, sold separately: GULV25 (USA) or GU25LV (UK/International)

### CERTIFICATIONS





# PRODUCT (NOTES)

BOND BLS73S

Bond Rally Series Wall Mounted Lavatory Faucet with Knob Handles

