

OPUS

OPS120

Opus 12" Rain Showerhead with 6" Ceiling Mounted Shower Arm



SHOWN IN OPUS 12" RAIN SHOWERHEAD WITH 6" CEILING MOUNTED SHOWER ARM | OPS120

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Flow Restriction Options: 1.5, 1.75, 2.0
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

OPS120X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 12" rain showerhead with easy clean rubber nozzles

Includes a 6" ceiling mounted shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

WATERWORKS

OPUS

OPS120


Opus 12" Rain Showerhead with 6" Ceiling Mounted Shower Arm

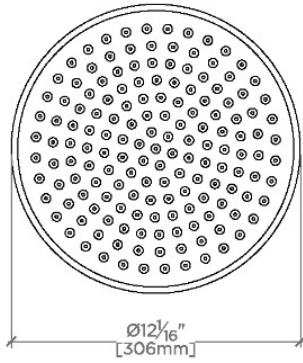

CEILING VIEW


SCALE: 1/2"=1'-0"

| STYLE NO. | DIM "A" | DIM "B" |
|-----------|-----------------------------------|-----------------------------------|
| EAS120 | 11 ¹ / ₁₆ " | 6 ⁹ / ₁₆ " |
| OPS120 | [297mm] | [166mm] |
| EAS121 | 17 ³ / ₄ " | 12 ⁹ / ₁₆ " |
| OPS121 | [450mm] | [319mm] |
| EAS122 | 23 ³ / ₄ " | 18 ⁹ / ₁₆ " |
| OPS122 | [603mm] | [472mm] |

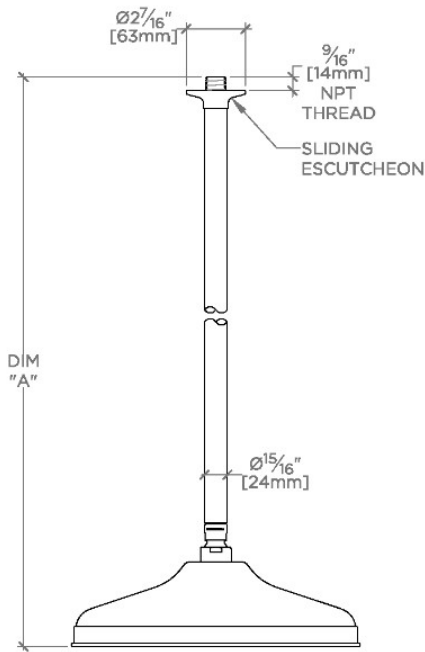

FRONT VIEW

SCALE: 1/2"=1'-0"

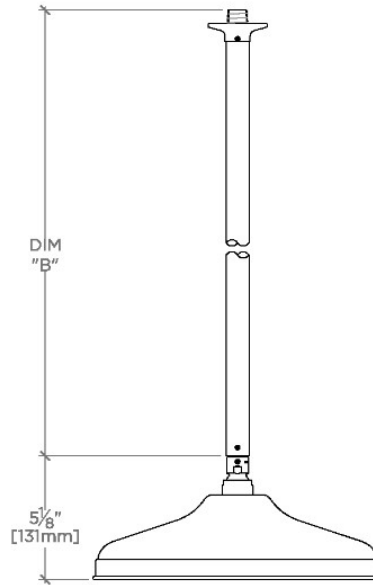

SIDE VIEW

SCALE: 1/2"=1'-0"