

Opus

OPS120

Opus 12" Rain Showerhead with 6" Ceiling Mounted Shower Arm



SHOWN IN OPUS 12" RAIN SHOWERHEAD WITH 6" CEILING MOUNTED SHOWER ARM | OPS120

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 32 mm
Flow Restriction Options: 1.5, 1.75, 2.0
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 6.6 liters/min
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

OPS120X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 12" rain showerhead with easy clean rubber nozzles

Includes a 6" ceiling mounted shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

WATERWORKS

Opus

OPS120


Opus 12" Rain Showerhead with 6" Ceiling Mounted Shower Arm

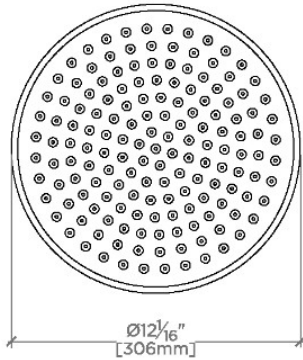

CEILING VIEW


SCALE: 1/2"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
EAS120	11 ¹ / ₁₆ "	6 ⁹ / ₁₆ "
OPS120	[297mm]	[166mm]
EAS121	17 ³ / ₄ "	12 ⁹ / ₁₆ "
OPS121	[450mm]	[319mm]
EAS122	23 ³ / ₄ "	18 ⁹ / ₁₆ "
OPS122	[603mm]	[472mm]

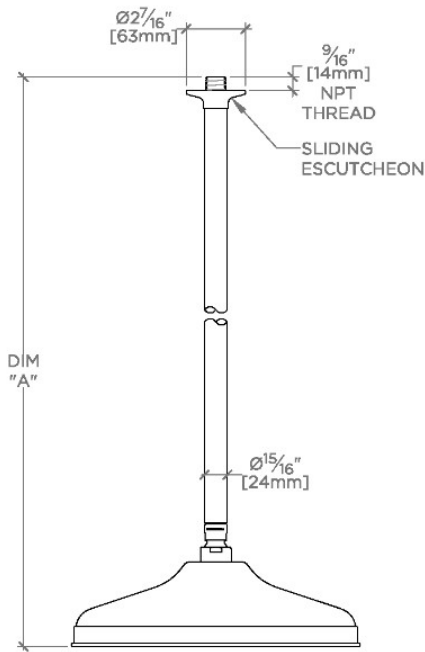

FRONT VIEW

SCALE: 1/2"=1'-0"

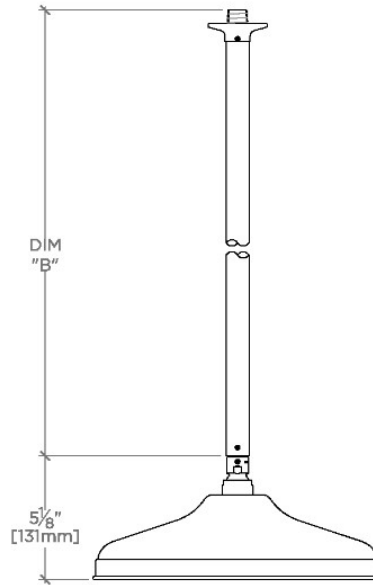

SIDE VIEW

SCALE: 1/2"=1'-0"