


REGULATOR

RGKM11

Regulator One Hole Gooseneck Bar Faucet with Two-Tone Wheel Handle

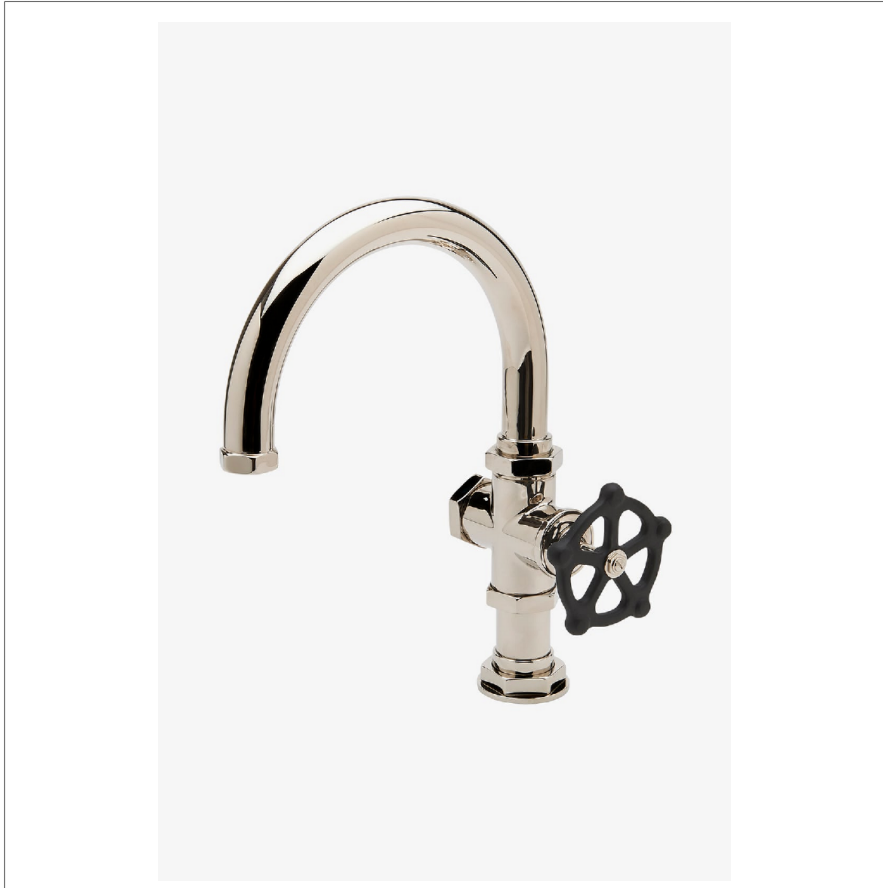

SHOWN IN REGULATOR ONE HOLE GOOSENECK BAR FAUCET WITH TWO-TONE WHEEL HANDLE | RGKM11

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 2 3/16"
 Deck Thickness Minimum: 1/4"
 Fittings Hole Diameter: 1 3/4"
 Handle Turn Angle: Quarter Turn
 Inlet Connection Size: 3/8"
 Inlet Connection Type: Compression Connector Hoses
 Number Of Holes: One Hole
 Restricted Maximum Flow Rate: 1.75 gpm
 Spout Swivel: Y
 Valve Material: Brass and Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

With striking scale and unique design, Regulator commands attention through its tribute to early 20th-century boiler room controls, when pride was lavished on hard-built parts. Each handcrafted fitting brings dramatic beauty through powerful proportions and honest details.

CODES & STANDARDS

RGKM11-F.RX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, DOE, State of MA

PRODUCT FEATURES

Progressive Control. When the wheel handle is rotated the flow of cold water begins; continue rotating activates the mixing by adding hot water; at the end of the rotation, only hot water flows. Full rotation is a quarter turn
 8" Gooseneck Swivel Spout

Standard flow rate is 1.8gpm (6.8 L/min)

CERTIFICATIONS




PRODUCT (NOTES)

REGULATOR


RGKM11

Regulator One Hole Gooseneck Bar Faucet with Two-Tone Wheel Handle




TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

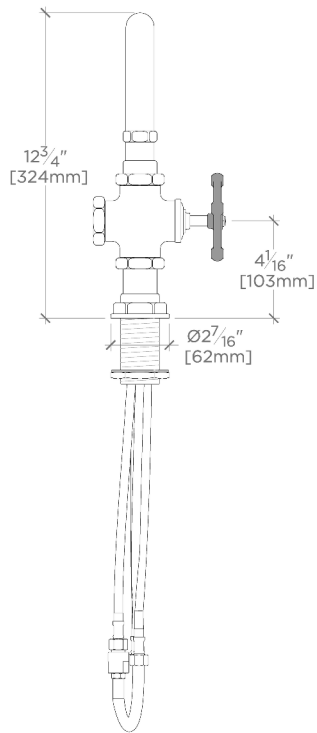

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

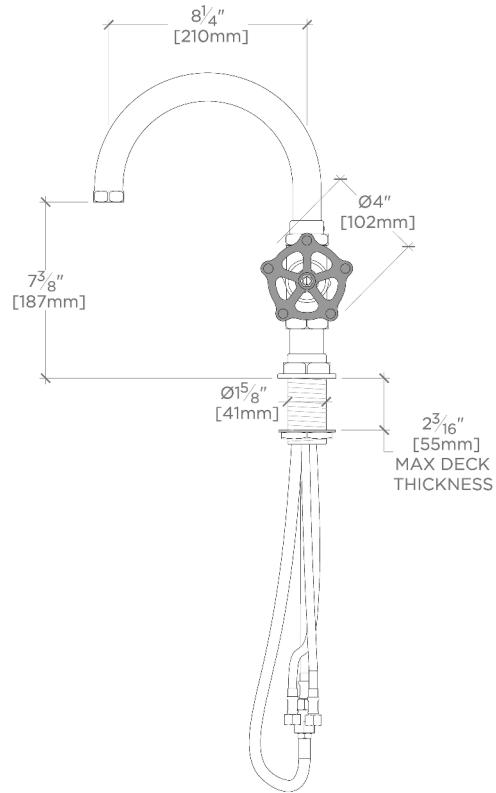

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$