REGULATOR

RGKM12

Regulator One Hole Gooseneck Bar Faucet with Wheel Handle

SHOWN IN REGULATOR ONE HOLE GOOSENECK BAR FAUCET WITH WHEEL HANDLE | RGKM12

TECHNICAL DETAILS

ADA Compliance: Yes
Deck Thickness Maximum: 2 3/16"
Deck Thickness Minimum: 1/4"
Fittings Hole Diameter: 1 3/4"
Handle Turn Angle: Quarter Turn
Inlet Connection Size: 3/8"
Inlet Connection Type: Compression Connector Hoses
Number Of Holes: One Hole
Restricted Maximum Flow Rate: 1.75 gpm
Spout Swivel: Y
Valve Material: Brass and Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

With striking scale and unique design, Regulator commands attention through its tribute to early 20th-century boiler room controls, when pride was lavished on hard-built parts. Each handcrafted fitting brings dramatic beauty through powerful proportions and honest details.

CODES & STANDARDS

RGKM12-F.RX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, DOE, State of MA

PRODUCT FEATURES

Progressive Control. When the wheel handle is rotated the flow of cold water begins; continue rotating activates the mixing by adding hot water; at the end of the rotation, only hot water flows.
Full rotation is a quarter turn
8" Gooseneck Swivel Spout

Standard flow rate is 1.8gpm (6.8 L/min)

CERTIFICATIONS

PRODUCT (NOTES)

REGULATOR

RGKM12

Regulator One Hole Gooseneck Bar Faucet with Wheel Handle



TOP VIEW SCALE: 1½"=1'-0"

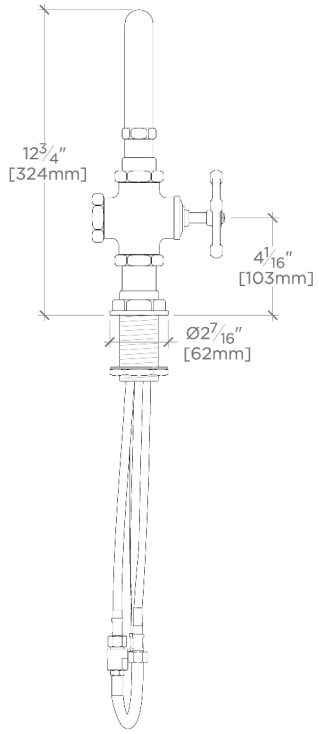

FRONT VIEW SCALE: 1½"=1'-0"

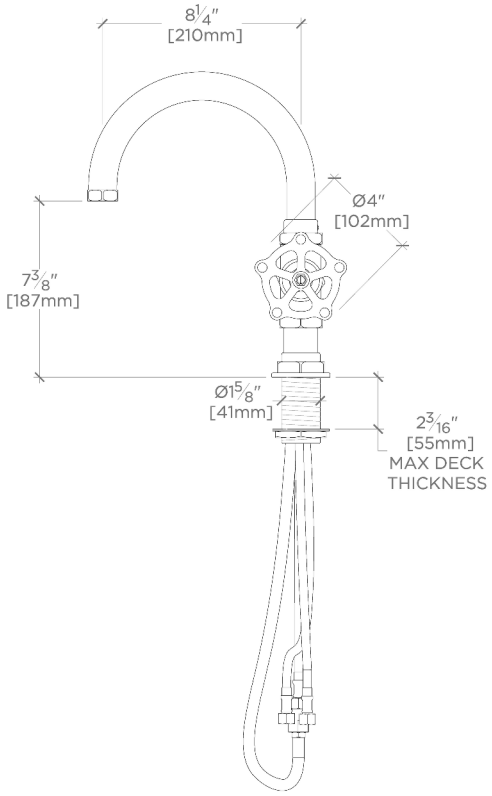

SIDE VIEW SCALE: 1½"=1'-0"