
WATERWORKS

EALS02 **EASTON**

Easton Classic Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Lever Handles

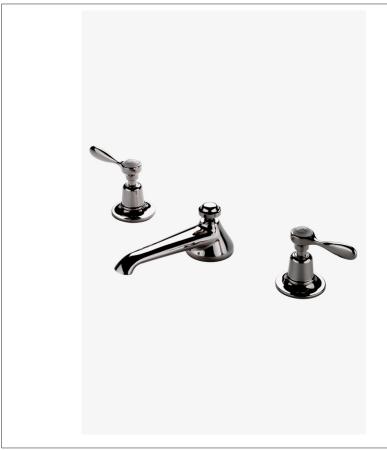

SHOWN IN EASTON CLASSIC LOW PROFILE THREE HOLE DECK MOUNTED LAVATORY FAUCET WITH METAL LEVER

INSPIRATION

Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of products from fittings to furniture.

TECHNICAL DETAILS

ADA Compliance: Yes

Adjustable versus Fixed Spray: Fixed Spray

Deck Thickness Maximum: 1 1/4"

Deck Thickness Minimum: 0"

Drain Assembly Materials: Brass Drain Depth Maximum: 1 3/8"

Drain Hole Diameter: 1 3/4"

Drain Style: Pop-up

Escutcheon Primary Material: Brass

Fittings Hole Diameter: 1 3/8" Handle Spread Maximum: 12"

Handle Spread Minimum: 8"

Handle Turn Angle: Quarter Turn

Index Color / Finish and Material: White Porcelain

Depth / Width: 9"

Drain Depth Minimum: 1 3/4"

Height: 3 1/2"

Index Marking: Hot/Cold

Inlet Connection Size: 1/2"

Inlet Connection Type: Male with supply nut

Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 8"

Installation Type: Deck Mounted

Length: 16"

Number of Handles: Two

Number of Holes: Three Hole

Primary Material: Brass

Restricted Maximum Flow Rate: 1.2 gpm

Spout Swivel: N

Suggested Application: Bath

Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi

Water Pressure Minimum: 20.0 psi

Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

Code # EALS02: ASME A112.18.1, CSA B125, NSF, CEC, IAPMO, State of MA

PRODUCT FEATURES

Brass metal is used for all trim and valve components

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.

Easton is our most comprehensive fittings family.

Easton has a clean-lined utilitarian profile, with a slightly elongated spout.

Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS



EASTON EALS02

Easton Classic Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Lever Handles

