


## OPUS

OPS102

Opus 10" Rain Showerhead with 18" Ceiling Mounted Shower Arm

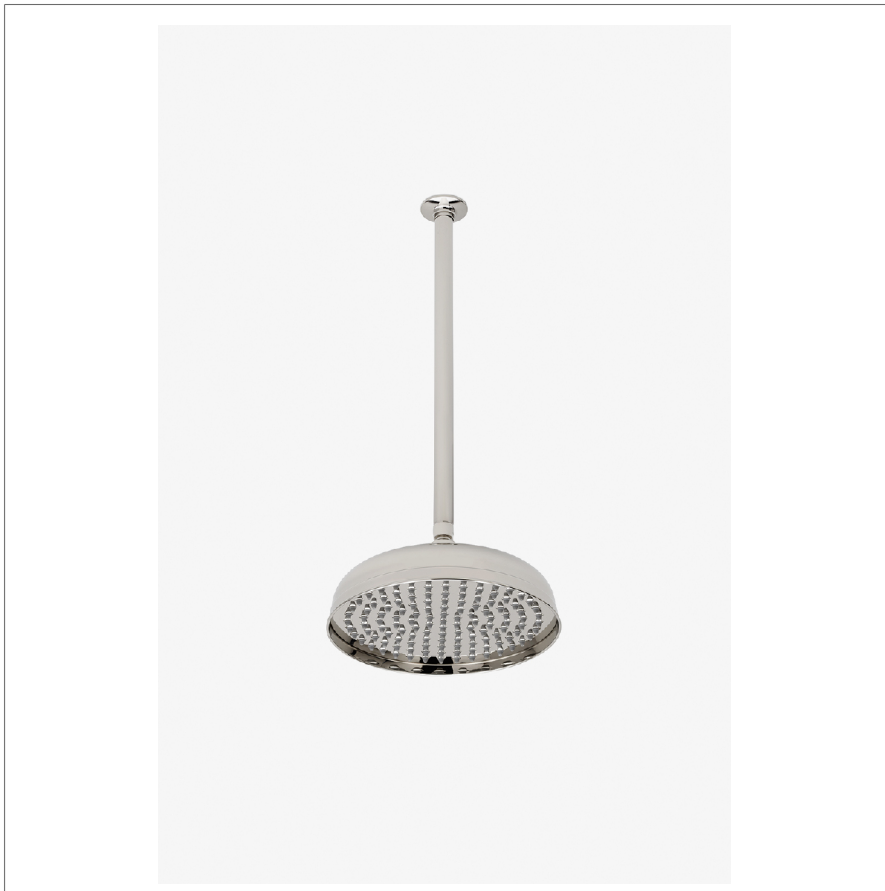

SHOWN IN OPUS 10" RAIN SHOWERHEAD WITH 18" CEILING MOUNTED SHOWER ARM | OPS102

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed  
 Fittings Hole Diameter: 1 1/4"  
 Flow Restriction Options: 1.5, 1.75, 2.0  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Male NPT  
 Pivot: Y  
 Primary Material: Brass  
 Restricted Maximum Flow Rate: 1.75 gpm  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 20.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

### CODES & STANDARDS

OPS102X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

### PRODUCT FEATURES

Made of Brass

Features a swivel 10" rain showerhead with easy clean rubber nozzles

Includes an 18" ceiling mounted shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel


Rain showerhead available in 1.75gpm (6.6L/min) flow rate

### CERTIFICATIONS




### PRODUCT (NOTES)

Opus 10" Rain Showerhead with 18" Ceiling Mounted Shower Arm

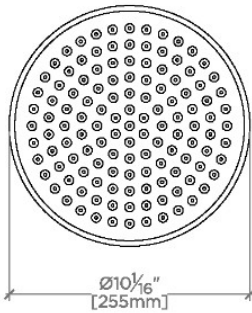


CEILING VIEW SCALE: 1/2"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
EAS100	11 1/8" [283mm]	6 9/16" [167mm]
OPS100		
EAS101	17 1/8" [435mm]	12 9/16" [319mm]
OPS101		
EAS102	23 1/8" [588mm]	18 9/16" [472mm]
OPS102		

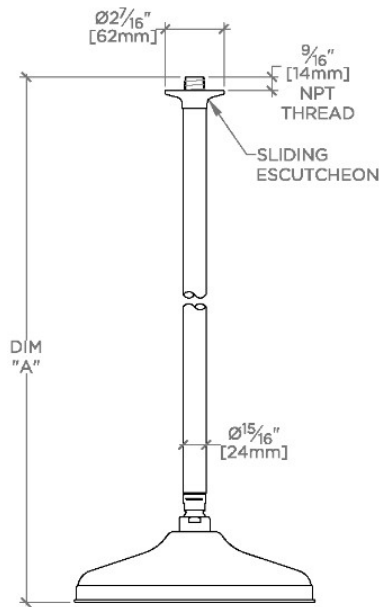

FRONT VIEW SCALE: 1/2"=1'-0"

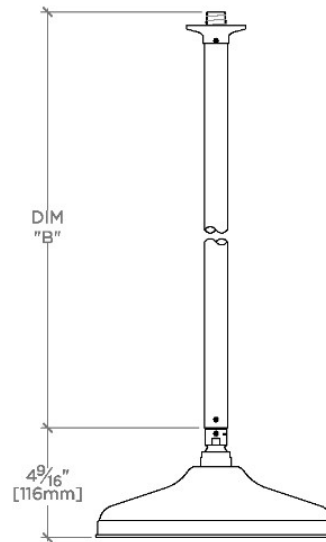

SIDE VIEW SCALE: 1/2"=1'-0"