

REGULATOR

RGKM31

Regulator Gooseneck Kitchen Faucet with Two-Tone Wheel Handle and Spray



SHOWN IN REGULATOR GOOSENECK KITCHEN FAUCET WITH TWO-TONE WHEEL HANDLE AND SPRAY | RGKM31

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 56 mm
 Deck Thickness Minimum: 6 mm
 Fittings Hole Diameter: 57 mm
 Handle Spread Maximum: 305 mm
 Handle Spread Minimum: 203 mm
 Handle Turn Angle: Half Turn
 Handshower Spray Hose Length: 1.5 m
 Inlet Connection Size: 3/8"
 Inlet Connection Type: Compression Connector
 Hoses
 Number Of Holes: Two Hole
 Restricted Maximum Flow Rate: 6.6 liters/min
 Spout Swivel: Y
 Spray Included In Unit: Y
 Valve Material: Brass and Ceramic
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

With striking scale and unique design, Regulator commands attention through its tribute to early 20th-century boiler room controls, when pride was lavished on hard-built parts. Each handcrafted fitting brings dramatic beauty through powerful proportions and honest details.

CODES & STANDARDS

RGKM31-F.RX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, DOE, State of MA

PRODUCT FEATURES

Casted brass temperature mixing valve. The user rotates the center control handle for preferred temperature.
 Solid brass wheel handles finished in matte black to control on/off/volume. Paint resistant to hard water
 Built-in automatic diverters for spray operation
 Standard flow rate is 1.8gpm (6.8 L/min)

CERTIFICATIONS




PRODUCT (NOTES)

REGULATOR


RGKM31

Regulator Gooseneck Kitchen Faucet with Two-Tone Wheel
Handle and Spray

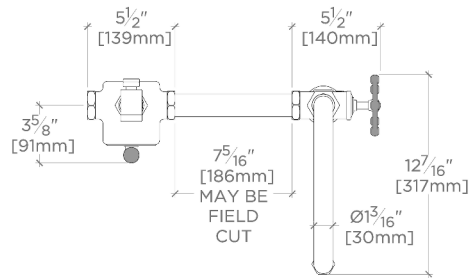


TOP VIEW

SCALE: 1"=1'-0"

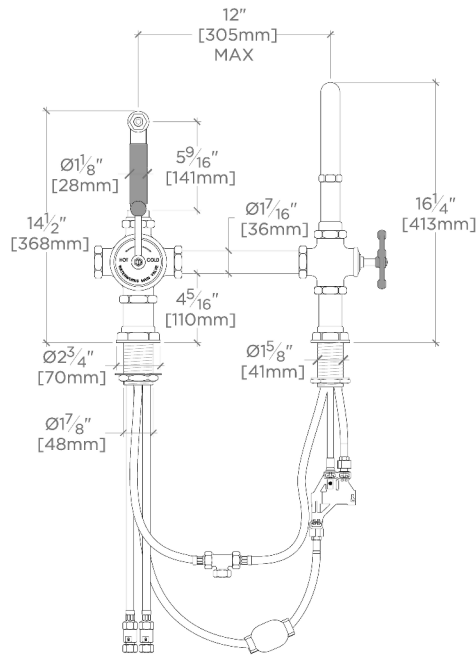

FRONT VIEW

SCALE: 1"=1'-0"

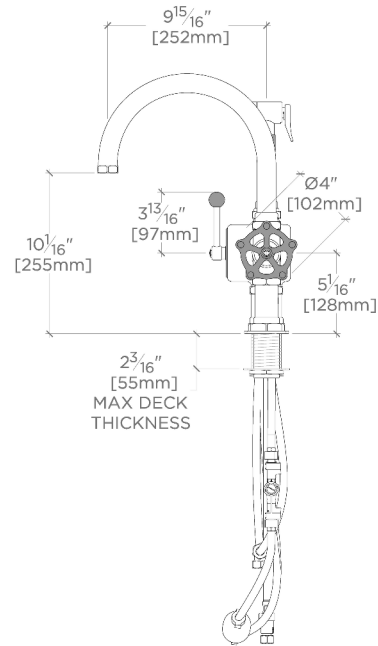

SIDE VIEW

SCALE: 1"=1'-0"