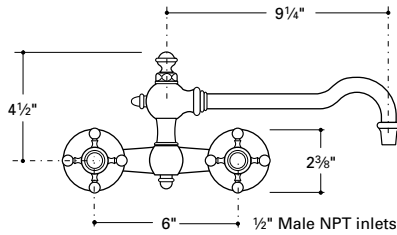


JUKM 02

Note:
Overall projection from wall: 11 $\frac{5}{8}$ "

INSTALLATION GUIDELINES

- Use only a protected, smooth-jawed, or strap wrench on any finished surface.
- The kitchen mixer should be on-site prior to rough-in. This allows the installer to visualize the installation and verify the center spread.
- Well-supported $\frac{1}{2}$ " female adapter elbows should be installed at the proper center spread.
- A minimum distance of 1" is required from the face of the adapter elbow to the face of the finished wall.
- Be sure that the supplies are level, secure, and on proper centers.
- After the wall is finished, install inlet nipples using thread sealant.
- Check for leaks.
- After installation, unscrew and remove the aerator assembly. Carefully open the hot and cold valves fully to flush out any debris in the supply lines. Once the lines have been flushed, close the valves and reinstall the aerator assembly.
- For servicing valve stem: Pull out index assembly (held in place by friction O-ring), exposing screw for handle. Cover should be hand tight.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am–7pm EST).

These guidelines have been prepared for the professional contractor to aid in the installation of:
JULIA WALL MOUNTED KITCHEN MIXER (JUKM 02)

All dimensions are based on original specifications and are subject to change and variation.
Please consult your Design Associate for current specifications.