HENRY

HNKM70

Henry One Hole Gooseneck Kitchen Faucet with Pull-Down Spray and Metal Lever Handle

SHOWN IN HENRY ONE HOLE GOOSENECK KITCHEN FAUCET WITH PULL-DOWN SPRAY AND METAL LEVER HANDLE|

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Adjustable Spray
Deck Thickness Maximum: 83 mm
Deck Thickness Minimum: 6 mm
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 35 mm
Flow Restriction Options: 2.0, 1.75, 1.5
Handle Turn Angle: Quarter Turn
Handshower / Spray Hose Length: 1.2 m
Depth / Width: 298 mm
Height: 432 mm
Inlet Connection Size: 3/8"
Inlet Connection Type: Compression Connector Hoses
Length: 298 mm
Primary Material: Brass
Restricted Maximum Flow Rate: 8.3 liters/min
Spout Swivel: Y
Spray Included in Unit: Y
Suggested Application: Bar, Kitchen, Laundry
Valve Material: Ceramic
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 2.0 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

PRODUCT FEATURES

The stately single hole fitting stands on a tall well formed pillar with a tapered lever handle. Practical as well a beautiful, this fitting has a hand spray for washing vegetables, rinsing the sink or cleaning pots.
Spray features a trigger to switch between aerated stream and jet spray.
Spray is held in place with a counter weighted magnet.
Handle rotates toward the front to prevent contact with backsplash.
Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also

CERTIFICATIONS

HENRY

HNKM70

Henry One Hole Gooseneck Kitchen Faucet with Pull-Down Spray and Metal Lever Handle

NOTE: RIGHT HAND INSTALLATION ONLY

TOP VIEW SCALE: 1"=1'-0"

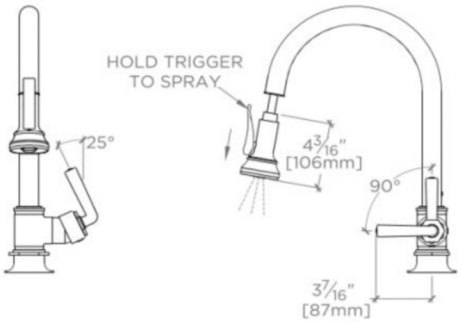

SPRAY AND HANDLE OPERATION VIEW SCALE: 1"=1'-0"

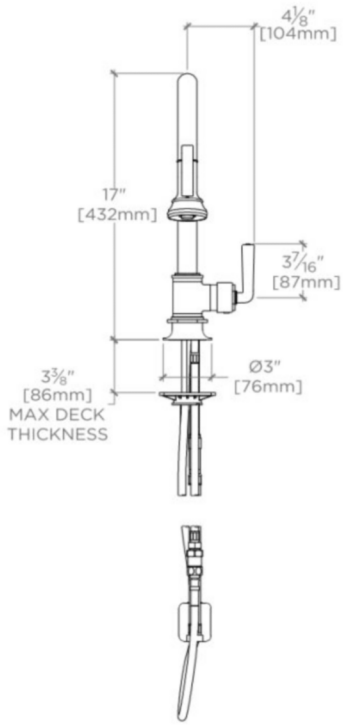

FRONT VIEW SCALE: 1"=1'-0"

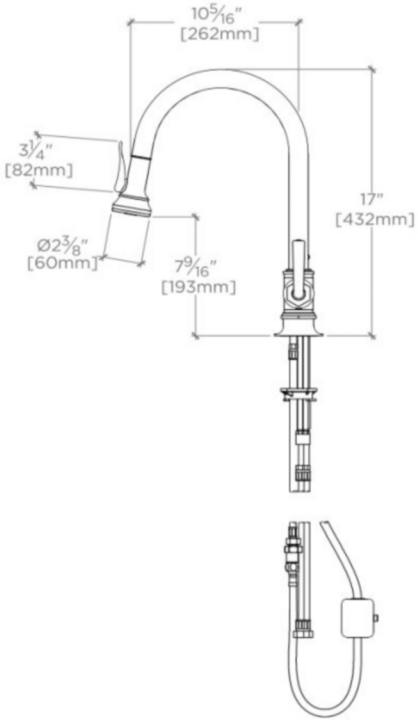

SIDE VIEW SCALE: 1"=1'-0"