
DASH

DSXT50

Dash Deck Mounted Exposed Tub Filler with Metal Handshower and Lever Handles

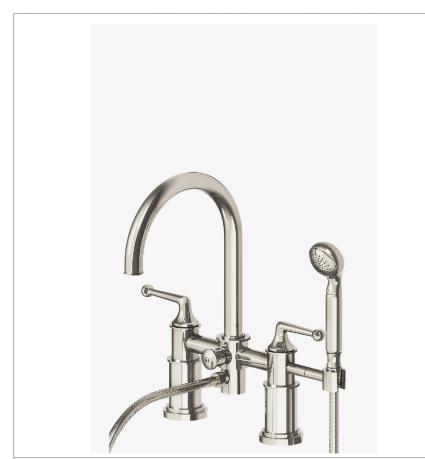

SHOWN IN DASH DECK MOUNTED EXPOSED TUB FILLER WITH METAL HANDSHOWER AND LEVER HANDLES | DSXT50

INSPIRATION

A blend of art and function, Dash pays homage to design elements of the 1930s with pared-down shapes, softened curves and minimal details.

TECHNICAL DETAILS

ADA Compliance: No Adjustable Versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 11/16" Deck Thickness Minimum: 0" Depth/Width: 9 13/16" Diameter Of Head: 2 3/8" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 1/8" Flow Restriction Options: 2.5, 2.2, 2.0, 1.75, 1.5, 1.2, 0.92 Handle Spread Maximum: 8" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Handshower Spray Hose Length: 59" Height: 16 5/16" Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Inlet Supply Spread Maximum: 8" Inlet Supply Spread Minimum: 8" Installation Type: Deck Mounted Integrated Diverter: Y Integrated Spray: N Length: 17 1/16 Number Of Handles: Two Number Of Holes: Two Hole Pivot: Y Primary Material: Brass Spout Swivel: N Spray Included In Unit: Y Suggested Application: Bath Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

State of MA

PRODUCT FEATURES

Metal Lever Handle

Includes Required Unions for Mounting

Handshower hook features adjustability to pivot the handshower forwards or backwards

Stocked in Nickel, Chrome, Unlacquered Brass, and Matte Nickel finishes

Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min) for handshower. State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.

CERTIFICATIONS

PRODUCT (NOTES)

DASH

DSXT50

Dash Deck Mounted Exposed Tub Filler with Metal Handshower and Lever Handles

