
PT06LS .25

.25 Low Profile Three Hole Wall Mounted Lavatory Faucet with Metal Lever Handles

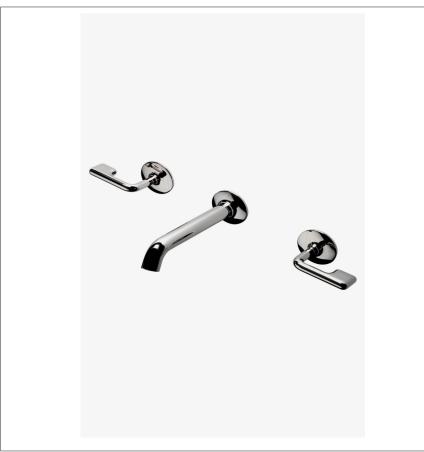

TECHNICAL DETAILS

ADA Compliance: Yes

Adjustable versus Fixed Spray: Fixed Spray Control Valve Rough-in Depth Maximum: 130 mm Control Valve Rough-in Depth Minimum: 64 mm

Drain Assembly Materials: Brass Drain Depth Maximum: 44 mm

Drain Hole Diameter: 44 mm

Drain Style: Push Touch

Escutcheon Primary Material: Brass

Flow Restriction Options: 1.75, 1.5, 1.0

Handle Spread Maximum: 203 mm

Handle Spread Minimum: 203 mm

Handle Turn Angle: Quarter Turn Depth / Width: 191 mm

Drain Depth Minimum: 32 mm

Height: 64 mm

Inlet Connection Size: 1/2"

Inlet Connection Type: Male G/BSPP

Inlet Supply Spread Maximum: 203 mm

Inlet Supply Spread Minimum: 203 mm

Installation Type: Wall Mounted

Length: 264 mm

Number of Handles: Two

Number of Holes: Three Hole Primary Material: Brass

Restricted Maximum Flow Rate: 8.3 liters/min

Spout Swivel: N

Suggested Application: Bath

Valve Material: Ceramic

Water Pressure Maximum: 5.5 bar Water Pressure Minimum: 1.5 bar

Water Pressure Recommended: 3.0 bar

SHOWN IN .25 LOW PROFILE THREE HOLE WALL MOUNTED LAVATORY FAUCET WITH METAL LEVER HANDLES PTLS06

INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful. Code #: ASME A112.18.1 / CSA B125.1, ASME A112.18.2 / CSA B125.2,

CODES & STANDARDS

NSF, CEC, IAPMO, State of MA

PRODUCT FEATURES

Uses a simple pop-up drain that is closed and opened by pushing down on the stopper. Does not use a lift rod to operate the drain stopper.

Generous length of the lever handle completes itself with an eased, pillowed square form.

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires 1.2gpm(4.5 L/min). Also available in other flow options. Contact a sales associate for details.

.25 PT06LS

.25 Low Profile Three Hole Wall Mounted Lavatory Faucet with Metal Lever Handles

