ESTB. 1978

WATERWORKS

Bradbury

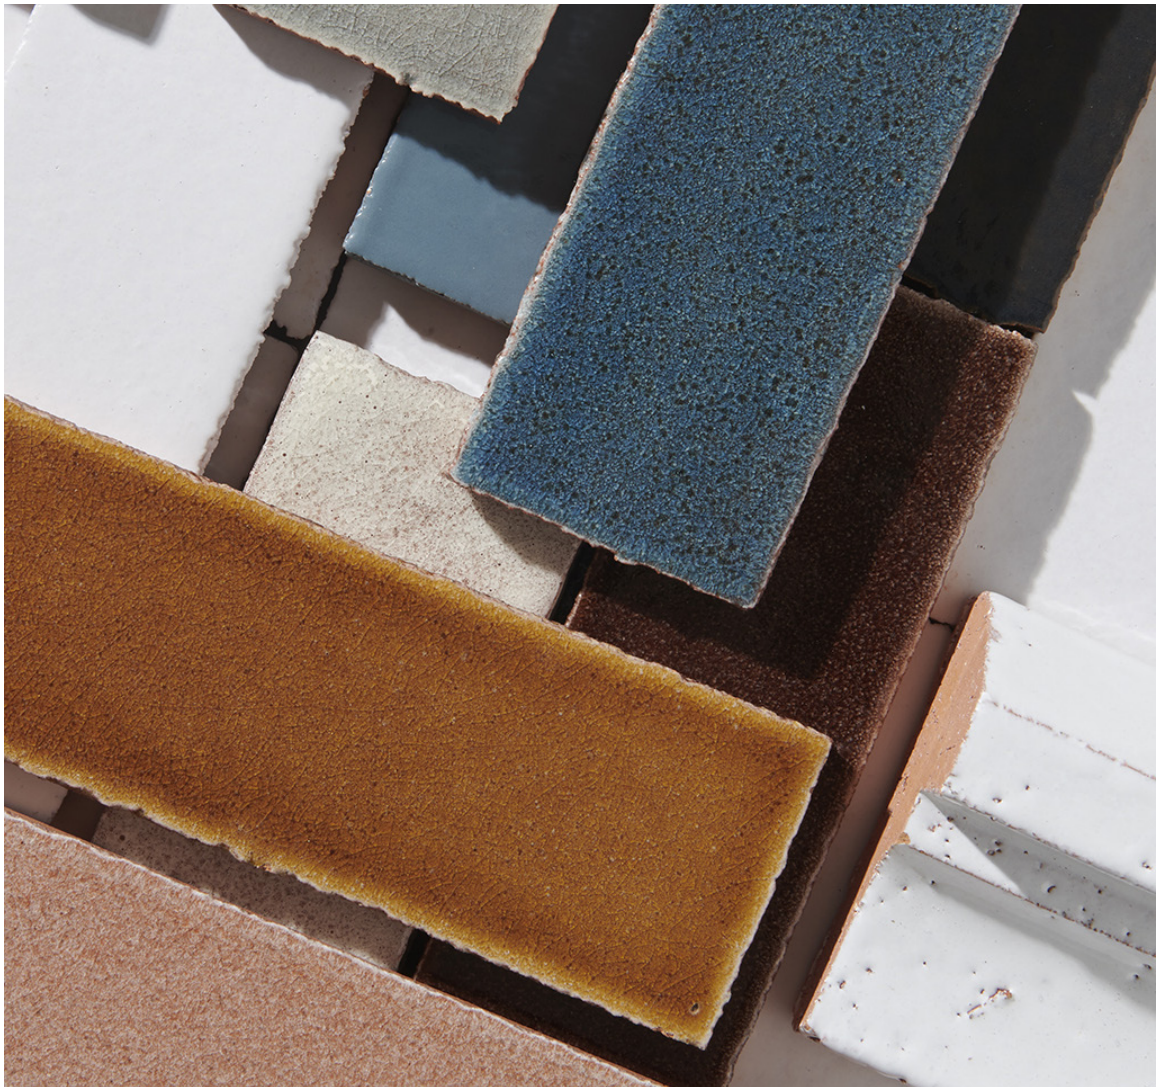

Inspired by the Bradbury Building, an L.A. historic landmark built in 1892, this versatile ceramic tile assortment captures some of the rugged texture of glazed bricks in a more refined way. Handcrafted from fine red-body clay, the designs have a special artisanal edge and a slightly irregular surface that reflects light, amplifying each tile's unique color variation and depth. Choose from distinctive shades that lend themselves to uncommonly beautiful tonal blends, as well as dramatic large-scale architectural trims that transform a room.

ESTB. 1978

WATERWORKS

Bradbury

FIELD TILE

2 ⅜" X 4" *
BRF024

2 ⅜" X 8 ¼" *
BRF028

3 ⅛" X 6 ¼" *
BRF036

4 ⅛" X 8 ¼" *
BRF048

ARCHITECTURAL ELEMENTS

BAR LINER
1" X 8 ¼"
BRLN01

SQUARE RAIL
2" X 8 ¼"
BRRL03



CHAIR RAIL
2 ⅜" X 8 ¼"
BRRL01

MOLDING RAIL
2 ⅜" X 8 ¼"
BRRL05

CAPITOL RAIL
3 ½" X 8 ¼"
BRRL04

CHISELED BASE
6 ⅛" X 8 ¼"
BRBS01

* Coordinating single and corner glazed edges available

ESTB. 1978

WATERWORKS

Bradbury

PALETTE


Domino V4
Glossy Crackle

Alchemy V4
Glossy Crackle

Ecru V4
Glossy Crackle

Spice V4
Glossy Crackle

Tiger Eye V4
Glossy Crackle

Kona V4
Glossy Crackle


Yale V4
Glossy Crackle

Prussian V4
Glossy Crackle


Aegean V4
Glossy Crackle

Silica V4
Glossy Crackle

Fararr V4
Glossy Crackle

Arctic V3
Glossy Solid

Arctic V3
Matte Solid

Harbor V3
Glossy Solid

River Blue V3
Glossy Solid

Calypso V3
Glossy Solid

Magnetite V4
Glossy Solid

* See variation chart on page 4
** Surface texture is inherent in the material; glazes may crackle

ESTB. 1978

WATERWORKS

Bradbury

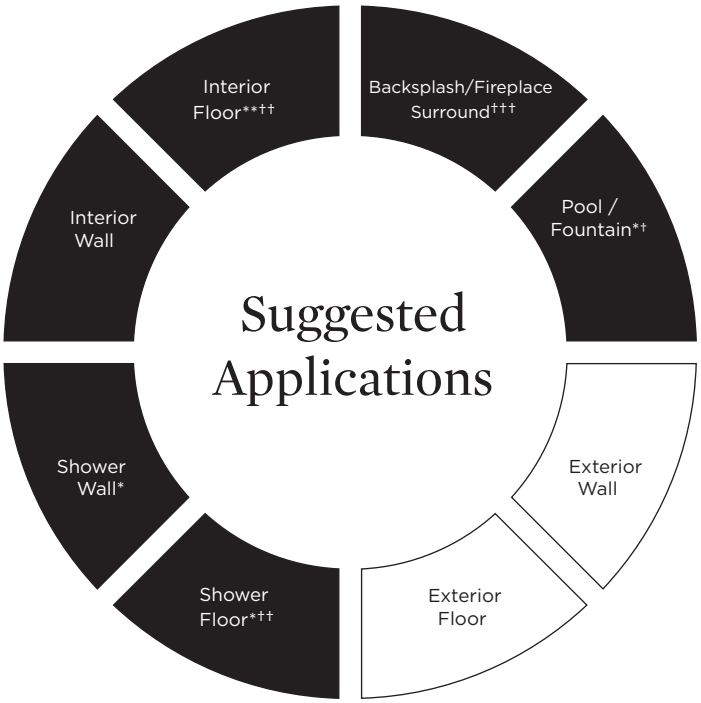

Recommended Use Not Recommended Use

Variation Level

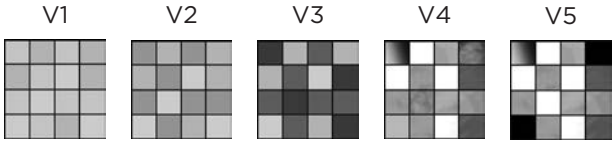

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness

*Nominal: +/- ⅛"

Suggested Grout Lines

⅛"

Application Notes

* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained

** Suitable for light traffic floor ONLY

† Suitable above waterline in tropical/subtropical climates only

† † Small format ONLY (2x4 ONLY)

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.