EASTON

ELS160

Easton Lavatory Faucet with Wave Lever Handle



SHOWN IN EASTON LAVATORY FAUCET WITH WAVE LEVER HANDLE | ELS160

TECHNICAL DETAILS

Deck Thickness Maximum: 1 15/16"
Deck Thickness Minimum: 3/8"
Drain Depth Maximum: 2 1/4"
Drain Depth Minimum: 1 1/2"
Drain Hole Diameter: 1 1/2"
Drain Style: Pop-Up
Fittings Hole Diameter: 1 3/8"
Handle Spread Maximum: 12"
Handle Spread Minimum: 8"
Handle Turn Angle: Quarter Turn
Inlet Connection Size: 1/2"
Inlet Connection Type: MALE WITH SUPPLY NUT
Integrated Diverter: N
Number Of Holes: Three Hole
Restricted Maximum Flow Rate: 1.2 gpm
Spout Swivel: N
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Rooted in classical Edwardian design, Easton is our most expansive collection—offering a comprehensive family of pieces that bring polished detail and timeless tradition to any setting. Revered for its exquisite proportions and impeccable scale, Easton is a trusted choice among designers.

CODES & STANDARDS

ELS160-F.RX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, WaterSense(1.0GPM and 1.2GPM Only), CEC, DOE

PRODUCT FEATURES

Wave Lever Handles

Includes Universal Lift and Turn Drain (UNLD23) which fits 1-1/2" through 1-3/4" drain hole openings

Available in 1.2gpm (4.5L/min) flow rate.

Stocked in Nickel and Brass


CERTIFICATIONS

PRODUCT (NOTES)


EASTON

ELS160


Easton Lavatory Faucet with Wave Lever Handle

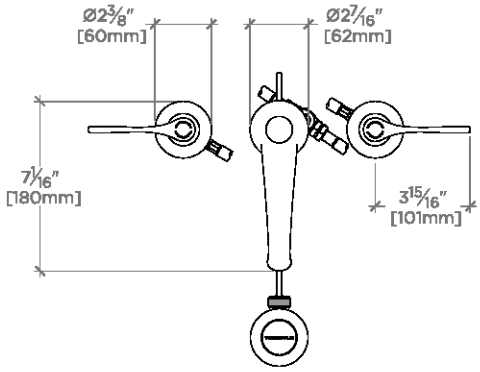

TOP VIEW SCALE: 1½"=1'-0"

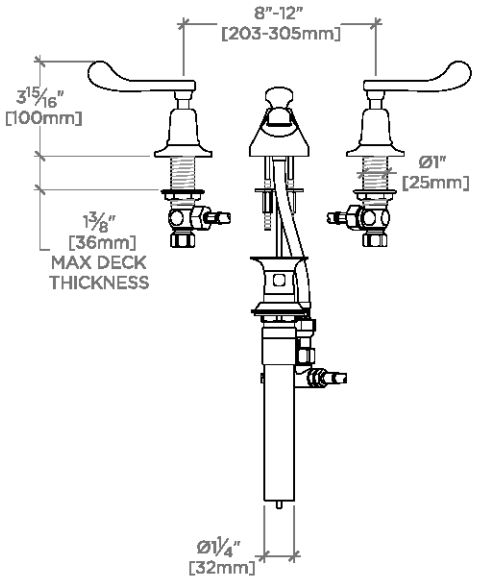

FRONT VIEW SCALE: 1½"=1'-0"

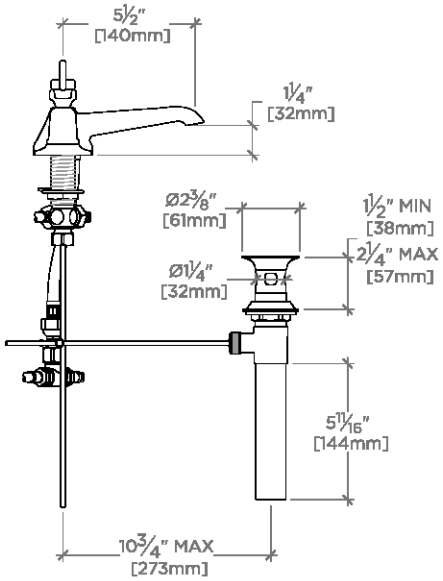

SIDE VIEW SCALE: 1½"=1'-0"