


HENRY

HKM301

Henry Three Hole Gooseneck Kitchen Faucet with Cross Handles and Spray

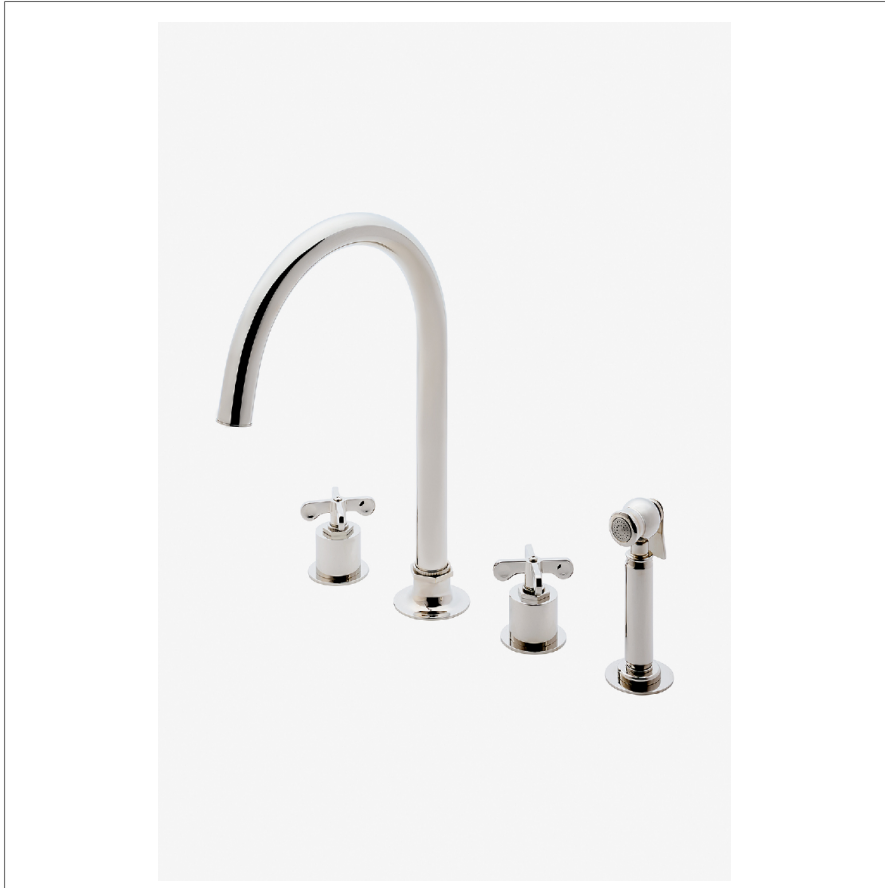

SHOWN IN HENRY THREE HOLE GOOSENECK KITCHEN FAUCET WITH CROSS HANDLES AND SPRAY | HKM301

TECHNICAL DETAILS

Deck Thickness Maximum: 1 1/16"
 Deck Thickness Minimum: 5/16"
 Fittings Hole Diameter: 1 3/8"
 Handle Turn Angle: Quarter Turn
 Handshower Spray Hose Length: 59"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male with Supply Nut
 Restricted Maximum Flow Rate: 1.75 gpm
 Spout Swivel: Y
 Spray Included In Unit: Y
 Valve Material: Brass and Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

PRODUCT FEATURES

Features Cross Handles

Stocked In Chrome, Nickel, Brass and Dark Nickel

Single function sidespray


CERTIFICATIONS

PRODUCT (NOTES)

HENRY


HKM301

Henry Three Hole Gooseneck Kitchen Faucet with Cross Handles and Spray

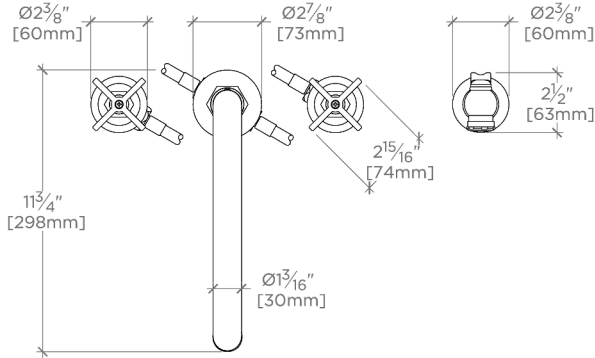


TOP VIEW

SCALE: 1 1/2"=1'-0"

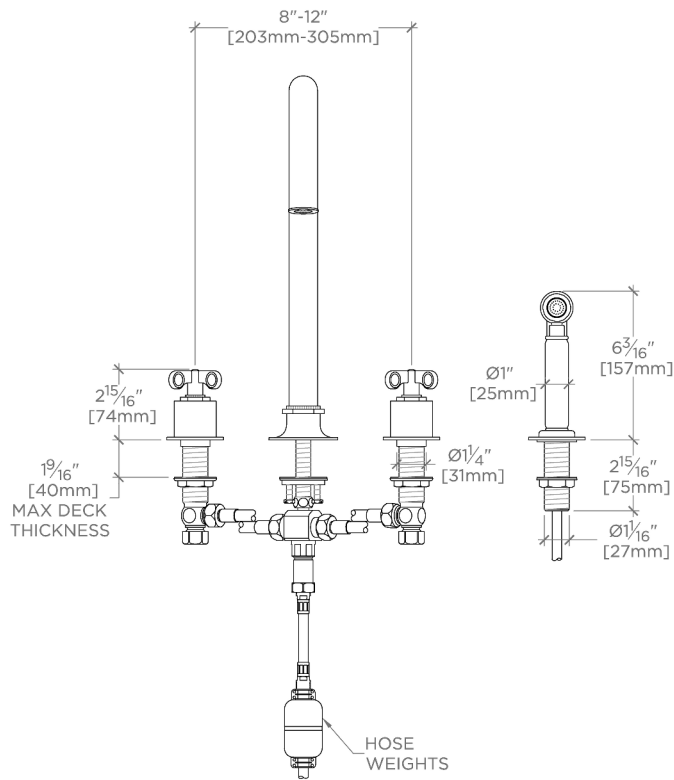

FRONT VIEW

SCALE: 1 1/2"=1'-0"

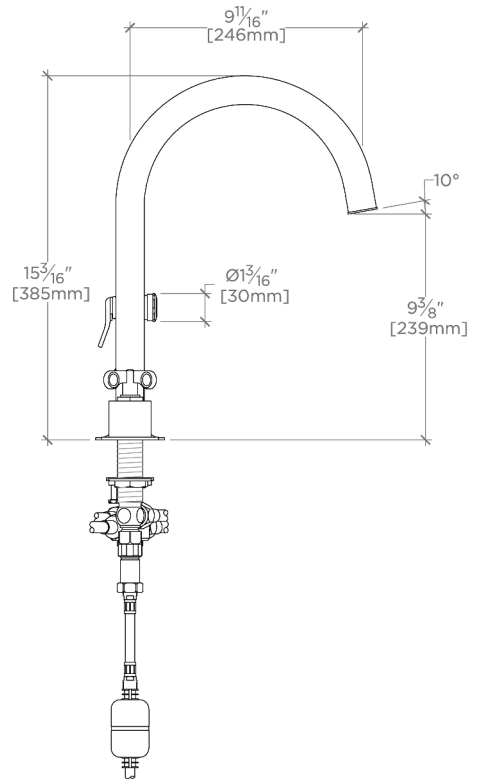

SIDE VIEW

SCALE: 1 1/2"=1'-0"