



ESTB. 1978

WATERWORKS

---

## Grove Twenty



Rugged refinement. Handcrafted from California clay, Grove Twenty brings organic warmth and character throughout the home. Laced with tiny pinholes, these brown bricks are individually hand-glazed to highlight their slightly rustic texture, infusing each tile with unique movement and color variation. Choose from 4 field sizes and 12 versatile shades, including elegant neutrals and rich, vibrant tones.



ESTB. 1978

# WATERWORKS

## Grove Twenty

### FIELD TILE



2 1/4" X 3 5/8" \*  
GTF024



2 1/4" X 7 5/8" \*  
GTF028



3 5/8" X 3 5/8" \*  
GTF044



3 5/8" X 7 5/8" \*  
GTF048

### ARCHITECTURAL ELEMENTS



Standard Rail  
2 3/8" X 7 5/8"  
GTRL01



Bolection Rail  
2" X 7 5/8"  
GTRL02



Cove Base  
3" X 7 5/8"  
GTBS01



Cove Base  
6" X 7 5/8"  
GTBS02

\* Coordinating single and corner glazed edges available



ESTB. 1978

# WATERWORKS

## Grove Twenty

### PALETTE



Bliss Glossy V3




Argent Glossy V3




Alpine Gray Glossy V3



Flint Glossy V3



Navy Glossy V3



Jet Glossy V3



Mariana Glossy V3



Aquamarine Glossy V3



Cypress Glossy V4



Morel Glossy V5



Poppy Glossy V4



Brunet Glossy V4

\* See variation chart on page 4


\*\* Surface texture is inherent in the material; glazes may crackle



ESTB. 1978

# WATERWORKS

## Grove Twenty

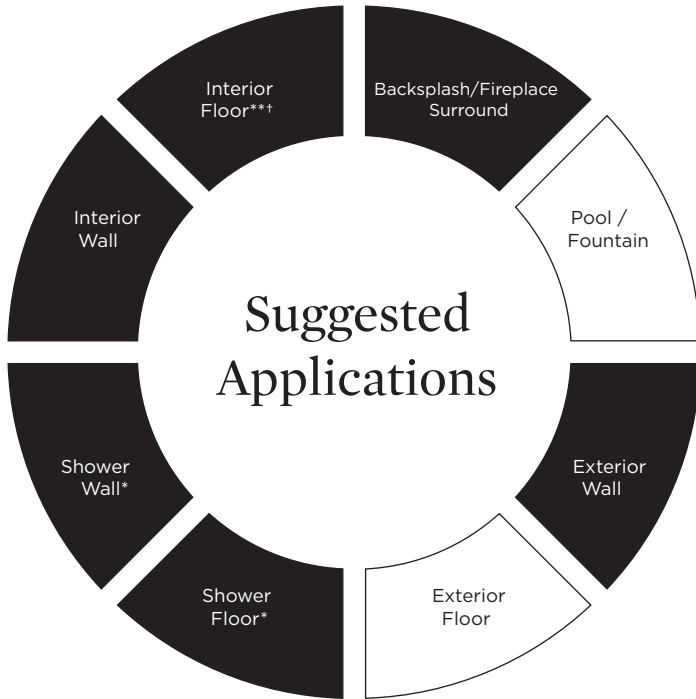

● Recommended Use      ○ Not Recommended Use

### Application Notes

- \* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained
- \*\* Suitable for light traffic floor ONLY
- † Suitable for radiant heat floors

### Variation Level

V1	V2	V3	V4	V5

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

### Thickness

5/8"\*

\*Nominal: +/- 1/8"

### Suggested Grout Lines

1/8" - 1/4"

### Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.