


# INSTALLATION GUIDELINES

## CEILING MOUNTED LIGHTING


### FINOT CUBE WALL/CEILING FLUSH MOUNT




STYLES	
NOLT05	NO05LT

#### IMPORTANT:

- **WARNING:** The power supply must be turned off prior to installation. Turn off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is **not** sufficient.
- See product specifications for exact product details.
- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/use of this product must keep this information for future reference.
- This product is U.L. Certified and is suitable for damp or dry locations. The U.L. Listing mark can be found on the inside of the cover plate.
- Be sure your installation conforms to all federal, state, and local codes.
- This product must be installed by a professional licensed contractor and must be onsite prior to installation, this allows the installer to visualize the installation.
- Inspect this product to ensure you have all the parts required for proper installation.
- Use only a strap wrench or protected/smooth-jaw wrench.

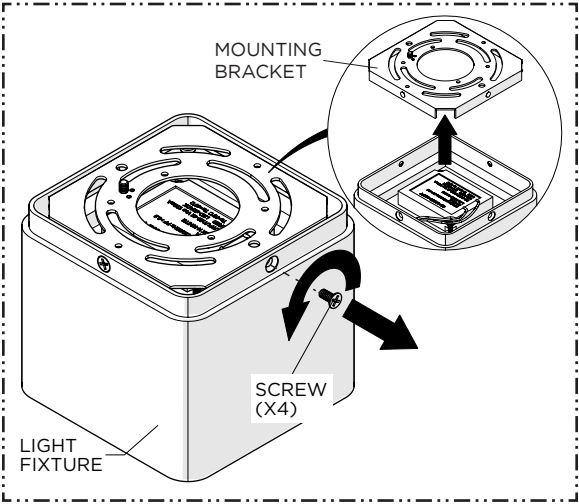


1. Unthread the SCREWS and carefully remove the MOUNTING BRACKET from the LIGHT FIXTURE.

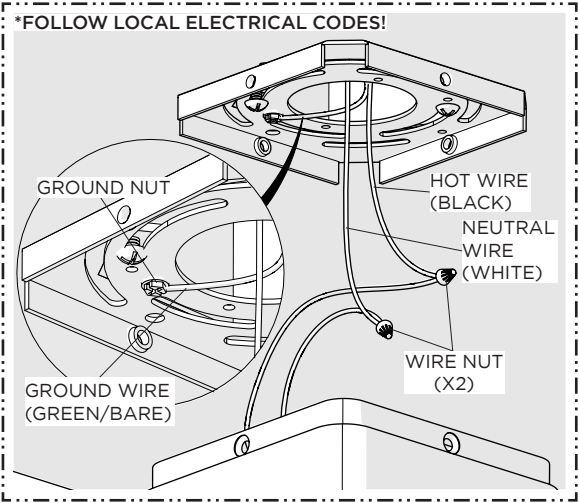


3. Use WIRE NUTS to connect the HOT (BLACK) and NEUTRAL (WHITE) WIRES from the JUNCTION BOX to the HOT (BLACK) and NEUTRAL (WHITE) WIRES of the FIXTURE, and connect the GROUND WIRE (GREEN) from the JUNCTION BOX to the GROUND NUT on the MOUNTING BRACKET.

# WATERWORKS

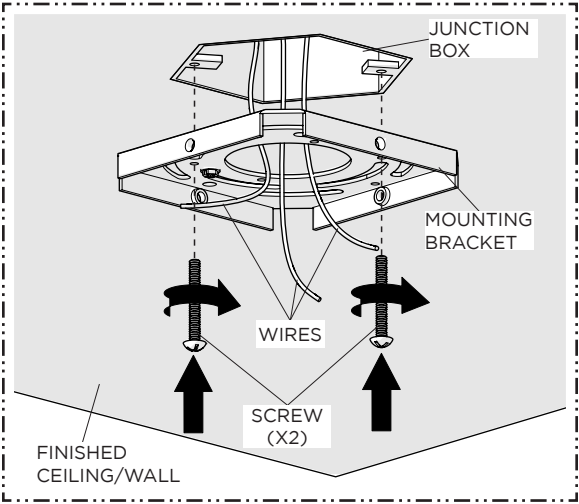

2. Route the ELECTRICAL WIRES through the center hole of the MOUNTING BRACKET and secure the MOUNTING BRACKET to the JUNCTION BOX with the provided SCREWS.

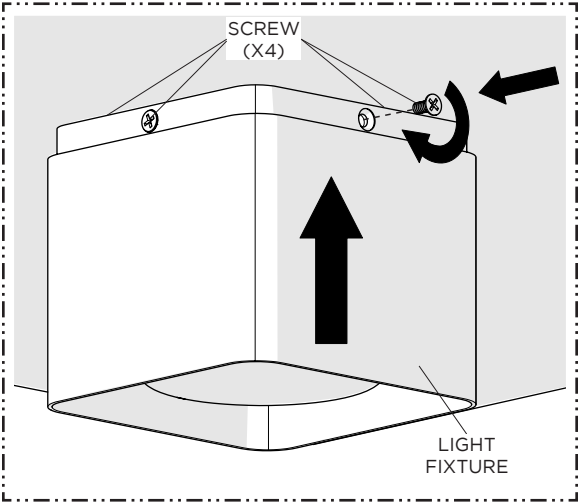

4. Once the wiring is complete, attach the LIGHT FIXTURE to the MOUNTING BRACKET using the provided SCREWS. Verify the FIXTURE is securely mounted.