



ESTB. 1978

WATERWORKS

Claypaper



Painterly, fluid brushstrokes wash over Claypaper tile. Each piece is hand-painted in soft colors, creating a gentle and varied artistic effect that partners well with many other surfaces.



ESTB. 1978

WATERWORKS

Claypaper

HANDMADE FIELD TILE



3" X 3" **
CZF033



3" HEXAGON **
CZFHX3



4 1/4" HEXAGON **
CZFHX4



3" X 6" *
CZF036



6" X 6" *
CZF066



3" X 12" *
CZF312



6" X 12" *
CZF612

*Note: Coordinating bullnose available

**Note: Handmade field tile can be tape faced for an additional charge



ESTB. 1978

WATERWORKS

Claypaper

HANDMADE MOSAICS



2" HEXAGON MOSAIC
CZMOH2



2" X 2" STACKED MOSAIC
CZMS22



2" X 2" STAGGERED MOSAIC
CZSM22



1 1/4" X 2 3/8" STACKED MOSAIC
CZMS12



1 1/4" X 2 3/8" STAGGERED MOSAIC
CZSM12



ESTB. 1978

WATERWORKS

Claypaper


TRIM



DEVON RAIL 1 7/8" X 6"
CZRL05



BELMONT RAIL 3" X 6"
CZRL07



EVERETT BASE 4 3/4" X 6"
CZBS03



QUARTER ROUND 1" X 6"
CZQR01



STANDARD LINER 1/2" X 6"
CZLN01



ESTB. 1978

WATERWORKS

Claypaper


PALETTE



Sea Glossy Wash V4-5



Indigo Glossy Wash V4-5



Breeze Glossy Wash V4-5



Pewter Glossy Wash V4-5



Cocoa Glossy Wash V4-5



Sage Glossy Wash V4-5



Nickel Glossy Wash V4-5



Egret Glossy Solid V2



Talc Glossy Solid V2


* See variation chart on page 7



ESTB. 1978

WATERWORKS

Claypaper

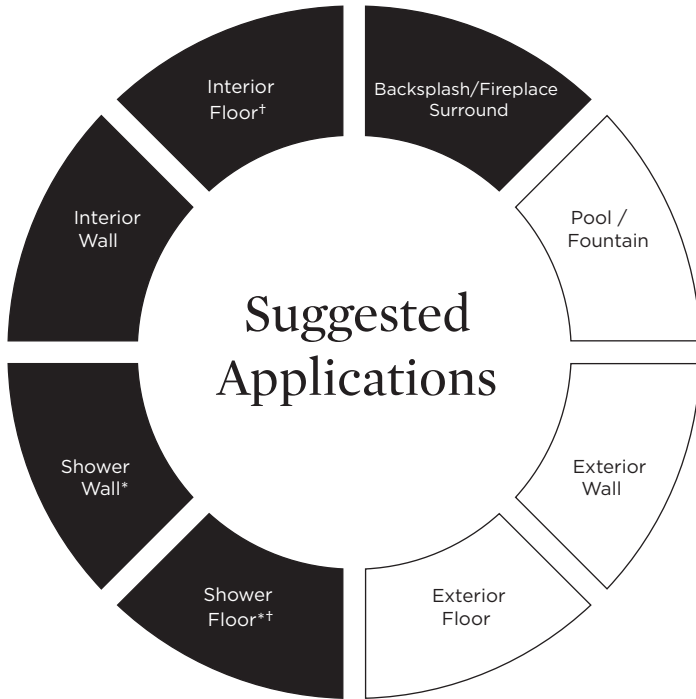

● Recommended Use ○ Not Recommended Use

Application Notes

* Suitable for use in wet environments, if properly installed, sealed, and maintained

† Small format field tile and mosaics

Variation Level

V1	V2	V3	V4-5	V5

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness

$\frac{3}{8}''^*$

*Nominal: +/- $\frac{1}{8}''$

Suggested Grout Lines

$\frac{1}{16}'' - \frac{1}{8}''$

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Seal tile PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials.
- Re-seal tile and grout after installation and maintain regularly.