

BOND

BLS24A

Bond Tandem Series Gooseneck Lavatory Faucet with
Guilloche Lines Knob Handles



SHOWN IN BOND TANDEM SERIES GOOSENECK LAVATORY FAUCET WITH GUILLOCHE LINES KNOB HANDLES | BLS24A

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 1 11/16"
 Deck Thickness Minimum: 1/4"
 Drain Depth Maximum: 2 5/8"
 Drain Depth Minimum: 3/8"
 Drain Hole Diameter: 1 3/4"
 Drain Style: Push Touch
 Fittings Hole Diameter: 1 3/8"
 Flow Restriction Options: 1.2
 Handle Spread Maximum: 12"
 Handle Spread Minimum: 8"
 Handle Turn Angle: Quarter Turn
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male with Supply Nut
 Number Of Holes: Three Hole
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.2 gpm
 Spout Swivel: N
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

BLS24AX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372,
 ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Knob Handles

Includes European size push touch drain

Features Linear Guilloche Etching Knob Handles

Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

BOND


BLS24A

Bond Tandem Series Gooseneck Lavatory Faucet with
Guilloche Lines Knob Handles

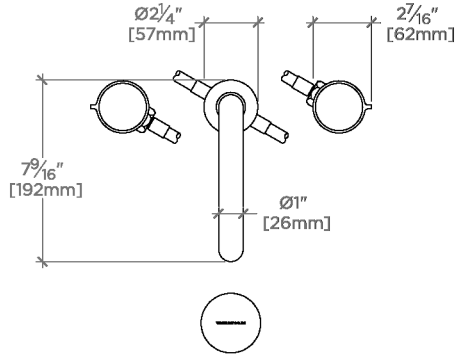


TOP VIEW

SCALE: 1½\"=1'-0"

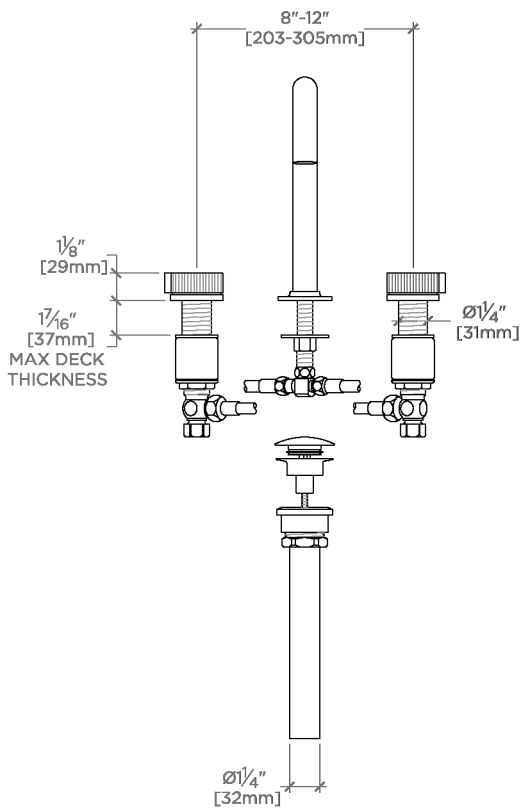

FRONT VIEW

SCALE: 1½\"=1'-0"

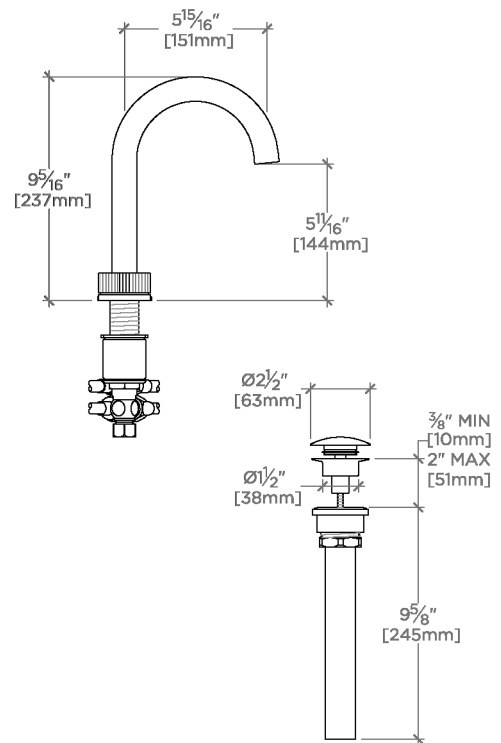

SIDE VIEW

SCALE: 1½\"=1'-0"