
HIGHGATE HGLS40

Highgate One Hole Lavatory Faucet with Cross Handle

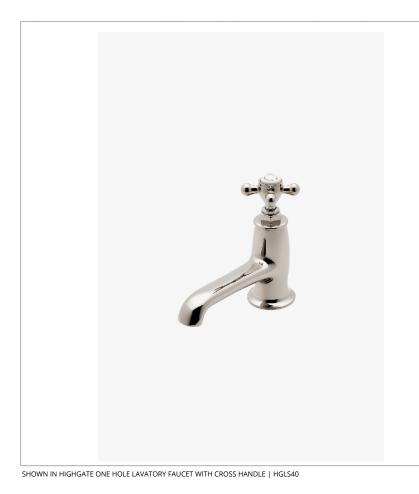

TECHNICAL DETAILS

ADA Compliance: Yes

Adjustable Versus Fixed Spray: Fixed Spray

Deck Thickness Maximum: 1 1/4" Deck Thickness Minimum: 3/8" Depth/Width: 6 7/8"

Drain Depth Maximum: 1 3/4" Drain Depth Minimum: 1 1/4" Drain Hole Diameter: 1 1/2" Fittings Hole Diameter: 1 3/8" Flow Restriction Options: 1.2 Handle Turn Angle: Quarter Turn

Height: 6 1/8"

Index Color Finish And Material: White Porcelain

Index Marking: H/C
Inlet Connection Size: 3/8"

Inlet Connection Type: Compression Connector Hoses

Installation Type: Deck Mounted

Integrated Diverter: N
Integrated Spray: N
Length: 2 1/4"
Number Of Handles: One
Number Of Holes: One Hole

Primary Material: Brass

Restricted Maximum Flow Rate: 1.2 gpm

Spout Swivel: N Spray Included In Unit: N

Spray Included In Unit: N
Suggested Application: Bath
Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

INSPIRATION

Our take on old English style: simple, functional shapes, detailed with white porcelain indices and hexagonal accents for a timeless feel.

CODES & STANDARDS

HGLS40X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Cross Handle

Includes Universal Lift and Turn Drain (UNLD30) which fits 1-1/2" through 1-3/4" drain hole openings

Stocked in Chrome, Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS





PRODUCT (NOTES)

USA style drain included.

HIGHGATE HGLS40

Highgate One Hole Lavatory Faucet with Cross Handle

