EASTON

ELS12V

Easton Lavatory Faucet with Vermillion Lever Handle



SHOWN IN EASTON LAVATORY FAUCET WITH VERMILLION LEVER HANDLE | ELS12V

TECHNICAL DETAILS

Deck Thickness Maximum: 1 15/16"
Deck Thickness Minimum: 3/8"
Drain Depth Maximum: 2 1/4"
Drain Depth Minimum: 1 1/2"
Drain Hole Diameter: 1 1/2"
Drain Style: Pop-Up
Fittings Hole Diameter: 1 3/8"
Handle Spread Maximum: 12"
Handle Spread Minimum: 8"
Handle Turn Angle: Quarter Turn
Inlet Connection Size: 1/2"
Inlet Connection Type: MALE WITH SUPPLY NUT
Restricted Maximum Flow Rate: 1.2 gpm
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Rooted in classical Edwardian design, Easton is our most expansive collection—offering a comprehensive family of pieces that bring polished detail and timeless tradition to any setting. Revered for its exquisite proportions and impeccable scale, Easton is a trusted choice among designers.

CODES & STANDARDS

ELS12V-F.RX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, WaterSense(1.0GPM and 1.2GPM Only), CEC, DOE

PRODUCT FEATURES

Earthenware Lever Handles

Includes Universal Lift and Turn Drain (UNLD23) which fits 1-1/2" through 1-3/4" drain hole openings

Available in 1.2gpm (4.5L/min) flow rate.

Includes interchangeable indices, with the Waterworks logo installed as standard and a complementary set of "H" & "C" indices presented in a velvet pouch, allowing you to tailor the look to your space.
Stocked in Nickel and Brass


CERTIFICATIONS

PRODUCT (NOTES)


EASTON

ELS12V


Easton Lavatory Faucet with Vermillion Lever Handle

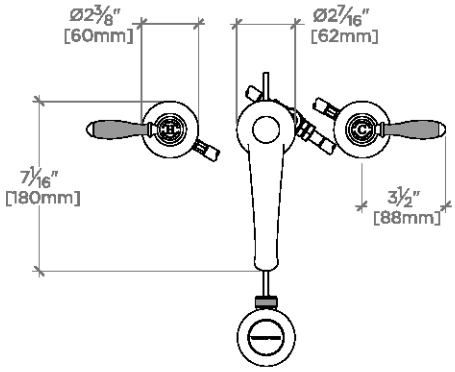

TOP VIEW SCALE: 1½"=1'-0"

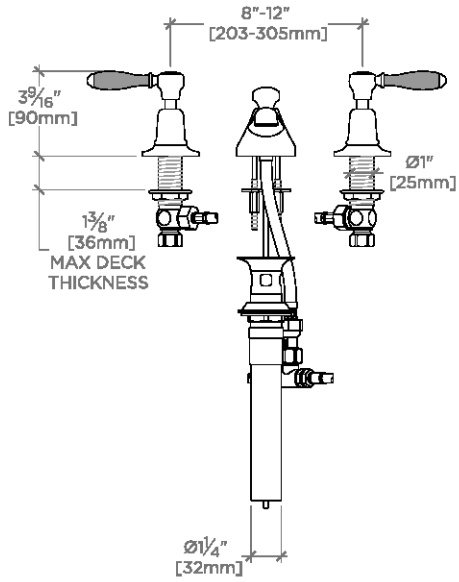

FRONT VIEW SCALE: 1½"=1'-0"

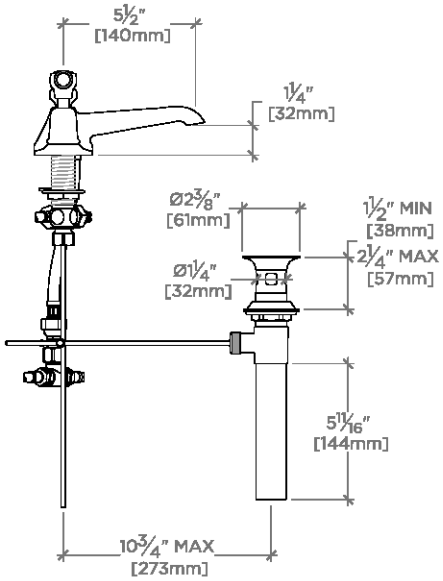

SIDE VIEW SCALE: 1½"=1'-0"