

## BOND

BLS230

Bond Solo Series Gooseneck Lavatory Faucet with Knob Handles



### TECHNICAL DETAILS

ADA Compliance: Yes  
Deck Thickness Maximum: 43 mm  
Deck Thickness Minimum: 6 mm  
Drain Depth Maximum: 67 mm  
Drain Hole Diameter: 44 mm  
Drain Style: Push Touch  
Fittings Hole Diameter: 35 mm  
Handle Spread Maximum: 305 mm  
Handle Spread Minimum: 203 mm  
Handle Turn Angle: Quarter Turn  
Drain Depth Minimum: 10 mm  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Male with Supply Nut  
Number of Holes: Three Hole  
Primary Material: Brass  
Restricted Maximum Flow Rate: 4.5 liters/min  
Spout Swivel: N  
Valve Material: Ceramic  
Water Pressure Maximum: 6.0 bar  
Water Pressure Minimum: 1.5 bar  
Water Pressure Recommended: 3.0 bar

### INSPIRATION

The Bond Collection: Modern bath designs infused with rare soul and artistry. Explore a range of statement-making elements: fittings, washstands, mirrors and more.

### PRODUCT FEATURES

Knob Handles

Includes European size push touch drain

Features Plateable Knob Handles

Stocked in Chrome, Nickel, Brass and Dark Nickel


Available in 1.2gpm (4.5L/min) flow rate

# WATERWORKS

## BOND


## BLS230

Bond Solo Series Gooseneck Lavatory Faucet with Knob Handles

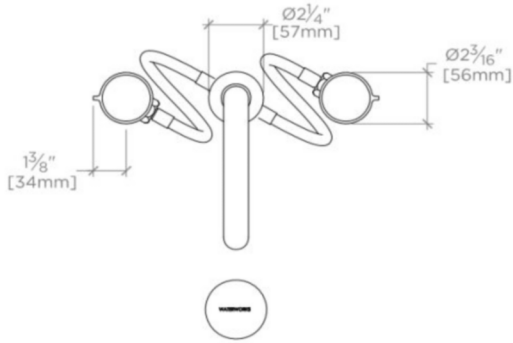


TOP VIEW

SCALE:  $1\frac{1}{2}$ "=1'-0"

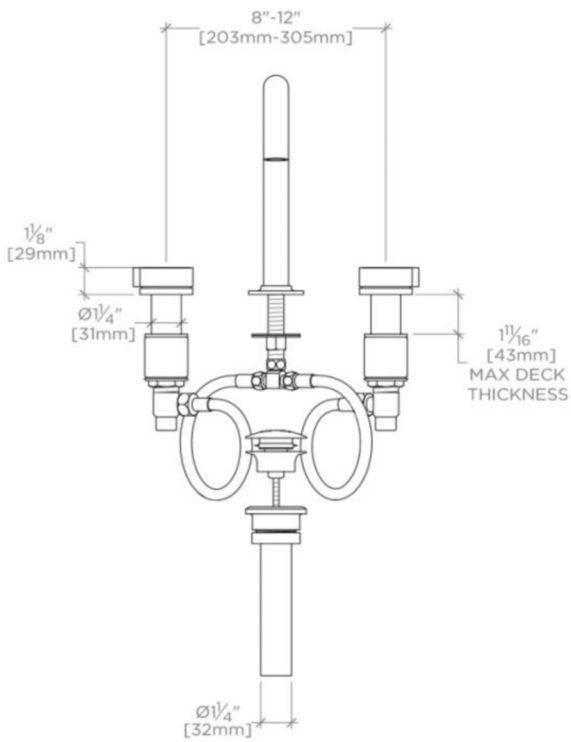

FRONT VIEW

SCALE:  $1\frac{1}{2}$ "=1'-0"

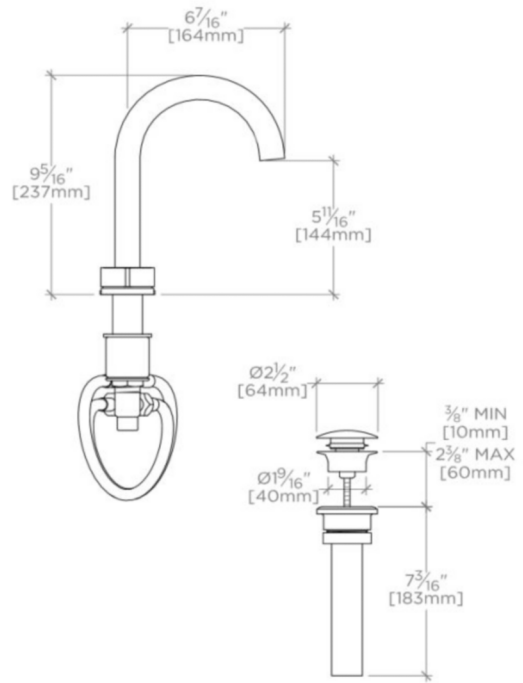

SIDE VIEW

SCALE:  $1\frac{1}{2}$ "=1'-0"